arXiv:1202.5474v1 [cs.IT] 24 Feb 2012

On the Pareto Boundary for the Two-User Single-Beam MIMO Interference Channel

Pan Cao, Eduard Jorswieck and Shuying Shi
Communications Theory, Communications Laboratory
Dresden University of Technology, Dresden, Germany
e-mail: {Pan.Cao, Eduard.Jorswieck, Shuying.Shi}@tu-dresden.de

Abstract

We consider a two-user multiple-input multiple-output (MIMO) interference channel (IC), where a single data stream is transmitted and each receiver applies the minimum mean square error (MMSE) filter. In this paper, we study an open topic on the Pareto boundary of the rate region. The Pareto boundary is divided by two turning points into the *weak Pareto boundary* (including the horizontal part and vertical part) and the *strict Pareto boundary* (including the upper-right part and turning points). The weak Pareto boundary and turning points can be computed exactly. For the strict Pareto boundary, we propose a computationally efficient method called iterative alternating algorithm (IAA) for maximizing the rate of one user while the rate of the other user is fixed. To deal with the difficult coupling of the two transmit beamformers in this optimization problem, we convert it into two single-beamformer optimization problems. Then, by certain equivalent transformations, each problem becomes a quadratically constrained quadratic programming (QCQP) problem, which can be optimally solved by the semidefinite relaxation (SDR) technique in combination with a matrix rank-one decomposition. Furthermore, convergence of the proposed IAA is guaranteed. Numerical simulations show that the IAA provides a better lower bound on the strict Pareto boundary compared with the existing methods.

I. INTRODUCTION

In cellular wireless systems, multiple sectors of different cells share the same time-frequency resource for transmission in order to increase the spectral efficiency and occupancy level. Obviously, inter-cell or inter-sector interference creates the interference channel (IC). For medium and high SNRs and transmitters/receivers operating close to the cell edge, the IC is interference limited. In this paper, we apply the achievable rate of each link as the performance measure and assume single-user decoding (SUD) at the receivers. The outermost boundary of the achievable rate region is called the Pareto boundary. For Pareto-optimal points, it is impossible to increase the rate of one user without decreasing the rate of the other user simultaneously. Thus, it is desired to design resource allocation schemes to achieve Pareto-optimal points. It has been shown that the competitive operation of the links leads to Nash equilibrium, which is usually far away from the Pareto boundary [1]. The coordination between the transmitters is required in order to improve their joint outcome and guarantee efficient system operation.

How to design cooperation schemes for the IC to achieve the Pareto boundary has attracted intensive research for several decades. Recently, some important results on characterization or computation of the Pareto boundary for the multiple-input single-output (MISO) IC have been obtained, and also the multiple-input multiple-output (MIMO) IC has been studied under some special conditions. Here, we give a brief, comprehensive, yet incomplete review of cooperation schemes for the MISO/MIMO IC.

A. MISO IC

For a two-user MISO IC, all possible Pareto-optimal beamformers can be characterized as linear combinations of the zero-forcing (ZF) and maximum-ratio transmission (MRT) beamformers [2]. This characterization is later used to derive a closed-form one-dimensional expression for the achievable rate region in [3]. A general framework for parameterizing Pareto-optimal transmit strategies was proposed in [4], which is applicable when the utility functions of the systems are monotonic in the received power gains. From the perspective of optimization, computing the Pareto-optimal points may boil down to solving a sequence of feasibility problems after certain transformations, which can be converted into second-order cone programming (SOCP) problems. This idea motivates an efficient algorithm for maximizing the SINR of one link for a given fixed SINR of the other link in a two-user MISO IC [5]. A decentralized algorithm based on the iterative updates of certain interference temperature constraints across different pairs of transmitters was proposed in [6], and two distributed optimal algorithms based on alternating projections for the MISO IC were developed in [7].

B. MIMO IC

However, it is not straightforward to extend the methods for the MISO IC to the MIMO IC, because the rate (or SINR) of the MIMO IC depends on both transmit and receive strategies. The hard coupling of transceiver strategies makes it extremely difficult to exactly achieve the whole Pareto boundary. Therefore, to the best of our knowledge, current studies on the MIMO IC have focused on efficiently finding high quality suboptimal operating points.

A commonly adopted method to obtain the Pareto boundary for the MIMO IC is via solving a sequence of weighted sum-rate maximization problems. Generally, this problem is non-convex and NP-hard, even in the single antenna case [8]. Therefore there is no guarantee to obtain a global optimal solution. A linear transceiver design algorithm for weighted sum-rate maximization for the MIMO interfering broadcast channel (IBC) was recently proposed in [9], where the sum-rate maximization problem is converted into an equivalent sum-MSE cost minimization problem. The iterative algorithm is guaranteed to converge to a stationary point. In addition, there also some weighted sum-rate maximization problem with additional constraints. For instance, the interference-pricing concept [10] is applied to maximize the sum rate of the two-user MIMO IC in [11]; Combining the parameterization [2] and distributed interference pricing, a beamforming technique was proposed based on balancing the egoistic and the altruistic behavior to maximize the sum rate for the single beam MIMO IC in [12]; In [13], the authors also studied cooperative algorithm to maximize sum-rate for the multi-user MIMO IC based on concept of interference alignment [14]. However, it is known that [14] well studied the degree of freedom of the MIMO IC rather than capacity region.

The weighted sum-rate maximization achieves a sequence of maximum weighted sum-rate operating points with different weights on the convex hull of the achievable rate region. However, this approach cannot guarantee the finding of all the Pareto boundary points when the rate region is non-convex because the tangent lines cannot be achieved at the non-convex part of boundary [6]. Furthermore, when there exists a rate constraint, it is not clear how to obtain the corresponding weights to achieve a rate tuple by the weighted sum-rate maximization.

A few works study the achievable rate region in the MIMO IC from other perspectives. For example, two interference aware-coordinated beamforming (IA-CBF) algorithms for the two-user MIMO IC were proposed in [15]. However, the MMSE IA-CBF achieves a lower bound of the sum rate, and the ZF IA-CBF achieves some operating points in the rate region by ZF strategies. Recently, a parametrization to characterize the Pareto boundary of the multi-cell MIMO performance region was proposed in [16]. However, under an assumption that each receiver (so called simple receiver) has only a single effective antenna in the optimization, it clearly leads to performance-loss on the achievable rate region comparing with joint transceiver optimization.

C. Outline and Contributions

In this paper, we consider a two-cell environment, where each cell has a base station (BS) with multiple antennas and a mobile station (MS) with multiple antennas. This scenario can be considered as a special case of the interfering broadcast channel (I-BC) for the downlink or the interfering multi-access channel (I-MAC) for the uplink, which can be modeled as two MIMO interfering links, $\mathrm{TX}_1 \mapsto \mathrm{RX}_1$ and $\mathrm{TX}_2 \mapsto \mathrm{RX}_2$, where $\mathrm{TX}_i, i = 1, 2$ and RX_i are i-th transmitter and receiver, respectively. A single data stream is transmitted. We assume that the RXs treat interference as noise and that the TXs have perfect local channel state information (CSI) and cooperate with each other. Each receiver applies a MMSE filter. For this two-user single-beam MIMO IC, how to achieve the Pareto boundary remains an open problem.

When one link has a rate/SINR constraint (e.g. rate requirement of primary link in underlay cognitive radio environments or for private messages), there is a need to find a way to directly compute a Pareto-optimal point corresponding to the rate constraint. This need motivates us to propose an optimization problem to maximize the rate of one link for a given rate of the other link. We develop an efficient algorithm to compute the Pareto boundary for this setting.

The main contributions to this open problem in the paper are as follows:

1) We propose another form of the SINR expression based on the Hermitian angle (Proposition 1 in Section II-B), which is helpful to understand and analyze the coupling of the transmit beamformers.
2) We prove that the strict Pareto boundary can be only achieved when both transmitters spend full power (Proposition 2 in Section III-A), which is a necessary condition for the strict Pareto-optimal beamformers.
3) Based on Proposition 1-2, we compute exactly some key points: all the weak Pareto-optimal points, the turning points (exactly on the strict Pareto boundary) and some of the ZF points (Section III-B).
4) We propose the IAA to compute the strict Pareto boundary. The problem of maximizing one rate with a constraint of the other rate is a non-convex optimization problem. Firstly, this problem is separated into two single-beamformer optimization problems by fixing each transmit beamformer, respectively. Then, by certain equivalent transformations, each single-beamformer optimization problem can be recast as a QCQP problem, which can be optimally solved by the SDR technique [17], [18] in combination with a matrix rank-one decomposition [19]. The convergence of the IAA is guaranteed (Section IV-B).

D. Notation

$\triangleq$ and $\overset{eig}{=}$ stands for ”is defined as” and ”perform eigen-decomposition as”, respectively. $\mathbb{C}^{n\times m}$ denotes the $n \times m$ complex matrix space. $(\cdot)^*$, $(\cdot)^T$, $(\cdot)^H$ and $(\cdot)^\dagger$ denote complex conjugate, transpose, Hermitian transpose and Moore-Penrose pseudo inverse, respectively. $|\cdot|$ and $\Re(\cdot)$ denotes the absolute value and the real part of a complex-valued number, respectively. $\|\boldsymbol{x}\| = \sqrt{\boldsymbol{x}^H\boldsymbol{x}}$ and $\overrightarrow{\boldsymbol{x}} = \frac{\boldsymbol{x}}{\|\boldsymbol{x}\|}$ denote the vector 2-norm and vector direction, respectively. $\perp$, $\parallel$ and $\nparallel$ denote perpendicularity, parallelity and unparallelity, respectively. $\boldsymbol{I}$ denotes an identity matrix of an appropriate dimension. $\mathrm{Rank}(\boldsymbol{X})$ and $\mathrm{Tr}(\boldsymbol{X})$ denotes the rank and trace of the matrix $\boldsymbol{X}$, respectively. $\boldsymbol{X} \succeq \boldsymbol{0}$, $\boldsymbol{X} \succ \boldsymbol{0}$, or $\boldsymbol{X} \prec \boldsymbol{0}$ means $\boldsymbol{X}$ is a positive semidefinite matrix, a positive definite matrix, or a negative definite matrix. $\lambda_i(\boldsymbol{X})$ and $\boldsymbol{u}_i(\boldsymbol{X})$ denote the i-th *largest* eigenvalue of $\boldsymbol{X}$ and its corresponding eigenvector, respectively. $\lambda_i(\boldsymbol{X}, \boldsymbol{Y})$ and $\boldsymbol{u}_i(\boldsymbol{X}, \boldsymbol{Y})$ denote the i-th largest generalized eigenvalue of $\boldsymbol{X}$ and $\boldsymbol{Y}$ its corresponding eigenvector, respectively. $\Pi_{\boldsymbol{X}} \triangleq \boldsymbol{X}(\boldsymbol{X}^H\boldsymbol{X})^{-1}\boldsymbol{X}^H$ denotes the orthogonal projection onto the column space of $\boldsymbol{X}$, and $\Pi^{\perp}_{\boldsymbol{X}} \triangleq \boldsymbol{I} - \Pi_{\boldsymbol{X}}$ denotes the orthogonal projection onto the orthogonal complement of the column space of $\boldsymbol{X}$.

II. SYSTEM MODEL

A. Signal Model

Consider a two-user MIMO IC, where the transmitters and receivers are equipped with $N_T \geq 2$ and $N_R \geq 2$ antennas, respectively, and only one data stream is transmitted to each receiver. The data received by RX_i is modeled as

$$y_i \; = \boldsymbol{g}_i^H\big(\boldsymbol{H}_{ii}\boldsymbol{w}_i x_i + \boldsymbol{H}_{ki}\boldsymbol{w}_k x_k + \boldsymbol{n}_i\big), \qquad i,\ k \in \{1, 2\} \text{ and } k \neq i$$

where $x_i \sim \mathcal{CN}(0, 1)$ is the transmitted symbol of TX_i by the transmit beamformer $\boldsymbol{w}_i \in \mathbb{C}^{N_T \times 1}$. At RX_i, $\boldsymbol{g}_i \in \mathbb{C}^{N_R \times 1}$ is the receive beamformer, and $\boldsymbol{n}_i \in \mathbb{C}^{N_R \times 1}$ is the additive white Gaussian noise (AWGN) vector with zero-mean and covariance matrix $\sigma_i^2\boldsymbol{I}$. The matrices $\boldsymbol{H}_{ii}, \boldsymbol{H}_{ki} \in \mathbb{C}^{N_R \times N_T}$ are the channel-matrix of the direct link $\mathrm{TX}_i \mapsto \mathrm{RX}_i$ and the cross-talk link $\mathrm{TX}_k \mapsto \mathrm{RX}_i$, respectively. Each transmitter has a power constraint that we, without loss of generality, set to 1 and define the set of feasible transmit beamformers as

$$\mathcal{W} \triangleq \{\boldsymbol{w} \in \mathbb{C}^{N_T \times 1} : \|\boldsymbol{w}\|^2 \leq 1\}.$$

B. Rate with MMSE Receiver

Assume that the interference from the other transmitter is treated as additive colored noise at each receiver. The rate of the link $\mathrm{TX}_i \mapsto \mathrm{RX}_i$ is given by:

$$R_i(\boldsymbol{w}_1, \boldsymbol{w}_2, \boldsymbol{g}_i) = \log_2\big(1 + \mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2, \boldsymbol{g}_i)\big), \tag{1}$$

where $\mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2, \boldsymbol{g}_i) = \frac{|\boldsymbol{g}_i^H \boldsymbol{H}_{ii} \boldsymbol{w}_i|^2}{\sigma_i^2 + |\boldsymbol{g}_i^H \boldsymbol{H}_{ki} \boldsymbol{w}_k|^2}$. In the linear transceiver design, it is well known that the MMSE filter is the optimal receiver for given transmit strategies. In this paper, the MMSE filter $\boldsymbol{g}_i = \left(\sigma_i^2 \boldsymbol{I} + \boldsymbol{H}_{ii} \boldsymbol{w}_i {\boldsymbol{w}_i}^H {\boldsymbol{H}_{ii}}^H + \boldsymbol{H}_{ki} \boldsymbol{w}_k {\boldsymbol{w}_k}^H {\boldsymbol{H}_{ki}}^H\right)^{-1} \boldsymbol{H}_{ii} \boldsymbol{w}_i$ is employed at RX_i. Then, $\mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2, \boldsymbol{g}_i)$ becomes

$$\mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2) = \boldsymbol{w}_i^H \overbrace{\boldsymbol{H}_{ii}^H \left(\sigma_i^2 \boldsymbol{I} + \boldsymbol{H}_{ki} \boldsymbol{w}_k {\boldsymbol{w}_k}^H {\boldsymbol{H}_{ki}}^H\right)^{-1} \boldsymbol{H}_{ii}}^{\triangleq \boldsymbol{A}_i(\boldsymbol{w}_k)} \boldsymbol{w}_i. \tag{2}$$

In (2), the complex mathematical structure (inverse of the sum of matrices and product of matrices) causes a hard coupling of $\boldsymbol{w}_1$ and $\boldsymbol{w}_2$ in the SINR in (2), which makes it difficult to analyze the SINR directly. To gain an insight into this coupling problem, we propose another form of the SINR expression.

Proposition 1 *For the two-user single-beam MIMO IC, the SINR in (2) can be reformulated as*

$$\mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2) = \sin^2(\theta_{H,i}) \cdot \frac{\|\boldsymbol{H}_{ii} \boldsymbol{w}_i\|^2}{\sigma_i^2} + \cos^2(\theta_{H,i}) \cdot \frac{\|\boldsymbol{H}_{ii} \boldsymbol{w}_i\|^2}{\sigma_i^2 + \|\boldsymbol{H}_{ki} \boldsymbol{w}_k\|^2}, \tag{3}$$

where $\cos(\theta_{H,i}) = \left| \overrightarrow{\boldsymbol{H}_{ii} \boldsymbol{w}_i}^H \cdot \overrightarrow{\boldsymbol{H}_{ki} \boldsymbol{w}_k} \right|$ *and* $\theta_{H,i} \in [0, \pi/2]$. $\square$

Proof: See Appendix A. $\blacksquare$

Note that the $\mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2)$ can be considered as a combination of $\frac{\|\boldsymbol{H}_{ii} \boldsymbol{w}_i\|^2}{\sigma_i^2}$ and $\frac{\|\boldsymbol{H}_{ii} \boldsymbol{w}_i\|^2}{\sigma_i^2 + \|\boldsymbol{H}_{ki} \boldsymbol{w}_k\|^2}$ with the weights $\sin^2(\theta_{H,i})$ and $\cos^2(\theta_{H,i})$. That is, $\mathrm{SINR}_i(\boldsymbol{w}_1, \boldsymbol{w}_2)$ depends not only on the power of the desired signal $\|\boldsymbol{H}_{ii} \boldsymbol{w}_i\|^2$ and the power of the interference $\|\boldsymbol{H}_{ki} \boldsymbol{w}_k\|^2$, but also on the Hermitian angle $\theta_{H,i}$ between the directions $\overrightarrow{\boldsymbol{H}_{ii} \boldsymbol{w}_i}$ and $\overrightarrow{\boldsymbol{H}_{ki} \boldsymbol{w}_k}$. The SINR is coupled in a difficult way because of the existence of $\theta_{H,i}$. This is why it is more difficult to analyze the SINR of a MIMO IC than that of a MISO IC. How to decouple this hard coupling problem to simplify the SINR analysis is a main challenge in this paper.

III. PARETO BOUNDARY AND COMPUTATION OF SOME KEY POINTS

A. *Pareto Boundary*

The rate region is defined as a set of the achievable rate pairs with all the feasible beamformers

$$\mathcal{R} \triangleq \bigcup_{\boldsymbol{w}_1, \boldsymbol{w}_2 \in \mathcal{W}} \Big(R_1(\boldsymbol{w}_1, \boldsymbol{w}_2), R_2(\boldsymbol{w}_1, \boldsymbol{w}_2) \Big).$$

The outermost boundary of $\mathcal{R}$ is called Pareto boundary. The Pareto boundary can be divided by two turning points into the *weak Pareto boundary* (including the vertical part and the horizontal part) and the *strict Pareto boundary* (including the upper-right part and two turning points).

The Pareto boundary can be denoted by a set $\mathcal{R}^\star \triangleq \bigcup (R_1^\star, R_2^\star)$ where $(R_1^\star, R_2^\star)$ is any Pareto-optimal operating point. For $(R_1^\star, R_2^\star)$ on the weak Pareto boundary, one rate is always fixed as the maximum rate. For $(R_1^\star, R_2^\star)$ on the strict Pareto boundary, it is impossible to improve one rate without simultaneously decreasing the other, and it can be reached unless both TX_1 and TX_2 spend the maximum transmit power. More precisely, we have the following proposition.

Proposition 2 *For the two-user single-beam MIMO IC, all the operating points on the strict Pareto boundary can be achieved only when both the transmitters spend the full power, i.e.,* $\|\boldsymbol{w}_1\|^2 = \|\boldsymbol{w}_2\|^2 = 1$.□

Proof: See Appendix B. ■

Although a similar result for the two-user MISO IC has been proved in [1], it cannot be extended to the MIMO case directly. As we will see later, this characterization of the strict Pareto-optimal beamformers is important for computation of the strict Pareto boundary. Here, we define a set of all the beamformers with full transmit power as

$$\mathcal{W}_{\mathcal{FP}} \triangleq \{\boldsymbol{w} \in \mathbb{C}^{N_T \times 1} : \|\boldsymbol{w}\|^2 = 1\}.$$

Note that all the strict Pareto-optimal transmit beamformers should be in the set $\mathcal{W}_{\mathcal{FP}}$.

Due to the Pareto-efficiency, it is desired to find Pareto-optimal strategies to achieve the Pareto boundary.

B. Computation of Some Key Points

In this part, we compute exactly the Pareto-optimal points (the whole weak Pareto boundary and two turning points on the strict Pareto boundary) and some of the ZF operating points.

1) ***Single-User Points*** *$SU1(\overline{R_1}, 0)$ and $SU2(0, \overline{R_2})$:* A single-user point can be easily achieved when only TX_i works and simultaneously operates ”egoistically” to maximize its own rate. The maximum achievable rate $\overline{R_i}$ of the link $\mathrm{TX}_i \mapsto \mathrm{RX}_i$ and its associated ”egoistic” strategy $\boldsymbol{w}_i^{Ego}$ are

$$\overline{R_i} = \log_2\Big(1 + \frac{\lambda_1(\boldsymbol{H}_{ii}^H \boldsymbol{H}_{ii})}{\sigma_i^2}\Big), \tag{4a}$$

$$\boldsymbol{w}_i^{Ego} = \boldsymbol{u}_1(\boldsymbol{H}_{ii}^H \boldsymbol{H}_{ii}), \quad i = 1, 2. \tag{4b}$$

2) ***Turning Points*** *$T1(\overline{R}_1, \underline{R}_2)$ and $T2(\underline{R}_1, \overline{R}_2)$:* A turning point can be achieved when one transmitter employs an ”altruistic” strategy to create no interference to the other receiver and simultaneously to maximize its own rate and the other transmitter operates ”egoistically”. For $T1(\overline{R}_1, \underline{R}_2)$, we easily find

$\theta_{H,1} = \pi/2$ in (3) can result no interference in the cross-talk link $\mathrm{TX}_2 \mapsto \mathrm{RX}_1$. How to find the "altruistic" strategy $\boldsymbol{w}_2^{Alt}$ is shown in the following proposition.

Proposition 3 *$T1(\overline{R}_1, \underline{R}_2)$ can be achieved by $(\boldsymbol{w}_1^{Ego}, \boldsymbol{w}_2^{Alt})$, where $\overline{R}_1$ and $\boldsymbol{w}_1^{Ego}$ are in (4) and*

$$\underline{R}_2 = \log_2\left(1 + \boldsymbol{w}_2^{Alt,H}\boldsymbol{A}_2(\boldsymbol{w}_1^{Ego})\boldsymbol{w}_2^{Alt}\right), \tag{5a}$$

$$\boldsymbol{w}_2^{Alt} = \overrightarrow{\Pi^{\perp}_{\boldsymbol{H}_{21}^H\boldsymbol{H}_{11}\boldsymbol{w}_1^{Ego}}\boldsymbol{u}_1\big(\boldsymbol{B}_i, \Pi^{\perp}_{\boldsymbol{H}_{21}^H\boldsymbol{H}_{11}\boldsymbol{w}_1^{Ego}}\big)}, \tag{5b}$$

with $\boldsymbol{B}_1 \triangleq \Pi^{\perp}_{\boldsymbol{H}_{21}\boldsymbol{H}_{11}\boldsymbol{w}_1^{Ego}}\boldsymbol{A}_2(\boldsymbol{w}_1^{Ego})\Pi^{\perp}_{\boldsymbol{H}_{21}^H\boldsymbol{H}_{11}\boldsymbol{w}_1^{Ego}}$. ☐

Proof: See Appendix C. ■

Similarly, $T2(\underline{R}_1, \overline{R}_2)$ with $(\boldsymbol{w}_1^{Alt}, \boldsymbol{w}_2^{Ego})$ can be easily obtained by interchanging the indices.

3) ***Weak Pareto-Optimal Points*** *$(R_1^\star, R_2^\star)$:* For the weak Pareto boundary, both the horizontal part and the vertical part start end with a single user point and a turning point. Therefore, an arbitrary operating point $(R_1^\star, R_2^\star)$ on the weak Pareto boundary can be computed as

$$R_i^\star = \gamma \cdot \underline{R}_i \quad \text{and} \quad R_k^\star = \overline{R}_k, \quad \forall i,\ k \in \{1,2\},\ k \neq i$$

where $i = 1$ and $i = 2$ correspond to the horizontal part and the vertical part, respectively. The scalar γ satisfies $\gamma \in [0, 1)$. The operating point $(R_1^\star, R_2^\star)$ becomes a single-user point or a turning point when $\gamma = 0$ or $\gamma = 1$, respectively. The associated weak Pareto-optimal transmit strategies are

$$\boldsymbol{w}_i^\star = \sqrt{\gamma} \cdot \boldsymbol{w}_i^{Alt} \quad \text{and} \quad \boldsymbol{w}_k^\star = \boldsymbol{w}_k^{Ego}.$$

Note that it is not necessary for both transmitters to spend the maximum transmit power simultaneously to achieve the weak Pareto boundary, which is different from the strict Pareto boundary (Proposition 2).

4) ***Zero-Forcing (ZF) Points*** *$ZF(R_1^{ZF}, R_2^{ZF})$:* In (3), we find $\theta_{H,1} = \theta_{H,2} = \pi/2$ results no interference in the cross-talk links $\mathrm{TX}_2 \mapsto \mathrm{RX}_1$ and $\mathrm{TX}_1 \mapsto \mathrm{RX}_2$ simultaneously. The ZF conditions are

$$\theta_{H,1} = \pi/2 \Leftrightarrow \overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}^H \cdot \overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2} = 0 \Leftrightarrow \boldsymbol{H}_{11}\boldsymbol{w}_1 \perp \boldsymbol{H}_{21}\boldsymbol{w}_2 \Leftrightarrow \boldsymbol{w}_2 \perp \boldsymbol{H}_{21}^H\boldsymbol{H}_{11}\boldsymbol{w}_1,$$

$$\theta_{H,2} = \pi/2 \Leftrightarrow \overrightarrow{\boldsymbol{H}_{22}\boldsymbol{w}_2}^H \cdot \overrightarrow{\boldsymbol{H}_{12}\boldsymbol{w}_1} = 0 \Leftrightarrow \boldsymbol{H}_{22}\boldsymbol{w}_2 \perp \boldsymbol{H}_{12}\boldsymbol{w}_1 \Leftrightarrow \boldsymbol{w}_2 \perp \boldsymbol{H}_{22}^H\boldsymbol{H}_{12}\boldsymbol{w}_1,$$

from which and under a sufficient (and necessary only when $N_T = N_R = 2$) condition [1], i.e., $\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1 \parallel \boldsymbol{H}_{22}^H \boldsymbol{H}_{12} \boldsymbol{w}_1$, we obtain some of the ZF transmit strategies

$$\boldsymbol{w}_1^{ZF} = \boldsymbol{u}_i(\boldsymbol{H}_{22}^H \boldsymbol{H}_{12}, \boldsymbol{H}_{21}^H \boldsymbol{H}_{11}) \text{ and } \boldsymbol{w}_2^{ZF} = \sum_{i=1}^{N_T-1} c_i \boldsymbol{u}_i(\Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{ZF}}),$$

where $\{c_i\}_{i=1}^{N_T-1}$ are complex-valued numbers and satisfy $\sum_{i=1}^{N_T-1} |c_i|^2 = 1$.

The $ZF(R_1^{ZF}, R_2^{ZF})$ can be achieved by $(\boldsymbol{w}_1^{ZF}, \boldsymbol{w}_2^{ZF})$ as

$$R_i^{ZF}(\boldsymbol{w}_1^{ZF}, \boldsymbol{w}_2^{ZF}) = \log_2\left(1 + \frac{\|\boldsymbol{H}_{ii} \boldsymbol{w}_i^{ZF}\|^2}{\sigma_i^2}\right), \quad i = 1, 2$$

Although the ZF points are not on the Pareto boundary, it is interesting to study ZF strategies if there exsits an additional requirement (like interference temperature or secrecy constraints) that each receiver is not allowed to receive the interference from other transmitters.

IV. COMPUTATION OF THE STRICT PARETO BOUNDARY

In this section, we propose an algorithm (called IAA) to compute the strict Pareto boundary. Since the rate region of the two-user single-beam MIMO IC is always a normal region according to Proposition 2, any operating point on the strict Pareto boundary is uniquely determined when one rate is fixed and the other rate is maximized. This motivates us to propose an optimization problem as follows

$$(\text{P0}) \begin{cases} \max\limits_{\boldsymbol{w}_1, \boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}} & \text{SINR}_1(\boldsymbol{w}_1, \boldsymbol{w}_2) \\ \\ \text{s.t.} & \text{SINR}_2(\boldsymbol{w}_1, \boldsymbol{w}_2) = \text{SINR}_2^\star. \end{cases}$$

where $\text{SINR}_2^\star \in (2^{\underline{R}_2} - 1, 2^{\overline{R}_2} - 1)$ is a SINR constraint, and $\boldsymbol{w}_1, \boldsymbol{w}_2$ should be in $\mathcal{W}_{\mathcal{FP}}$ according to Proposition 2. Then, an strict Pareto-optimal point $(R_1^\star, R_2^\star) = \big(\log_2(1 + \text{SINR}_1(\boldsymbol{w}_1^\star, \boldsymbol{w}_2^\star)), \log_2(1 + \text{SINR}_2^\star(\boldsymbol{w}_1^\star, \boldsymbol{w}_2^\star))\big)$ can be achieved by the optimal solution $(\boldsymbol{w}_1^\star, \boldsymbol{w}_2^\star)$ to (P0).

However, it is difficult to solve this non-convex optimization problem directly due to the hard coupling of $\boldsymbol{w}_1$ and $\boldsymbol{w}_2$ in the SINR expression. To resolve this coupling problem, we convert (P0) into two single-beamformer optimization problems by fixing $\boldsymbol{w}_1$ and $\boldsymbol{w}_2$, respectively. Since both single-beamformer optimization problems are still non-convex, how to find the optimal solutions to these optimization problems will be studied in Section IV-A and Section IV-B. The Section IV-C will describe the algorithm in detail.

---

[1] This condition is the same as that in [15], while we derive it from a different perspective (Hermitian angle in (3)).

A. Optimization of TX_1

For a given *feasible* $\boldsymbol{w}_2$ (how to find a feasible $\boldsymbol{w}_2$ will be shown in Proposition 4), the problem $(\mathrm{P0})$ becomes a single-beamformer optimization problem with respect to $\boldsymbol{w}_1$. Its constraint is

$$\begin{aligned}
&\boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \big(\sigma_2^2 \boldsymbol{I} + \boldsymbol{H}_{12}\boldsymbol{w}_1 {\boldsymbol{w}_1}^H {\boldsymbol{H}_{12}}^H\big)^{-1} \boldsymbol{H}_{22}\boldsymbol{w}_2 = \mathrm{SINR}_2^\star \\
\overset{(a)}{\Longleftrightarrow}\, &\boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 - \frac{|\boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{12}\boldsymbol{w}_1|^2}{\sigma_2^2 + \|\boldsymbol{H}_{12}\boldsymbol{w}_1\|^2} = \sigma_2^2 \mathrm{SINR}_2^\star, \\
\overset{(b)}{\Longleftrightarrow}\, &\frac{{\boldsymbol{w}_1}^H \boldsymbol{H}_{12}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 \boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{12}\boldsymbol{w}_1}{\boldsymbol{w}_1^H(\sigma_2^2 \boldsymbol{I} + \boldsymbol{H}_{12}^H \boldsymbol{H}_{12})\boldsymbol{w}_1} = \boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 - \sigma_2^2 \mathrm{SINR}_2^\star, &&\text{(8a)} \\
\overset{(c)}{\Longleftrightarrow}\, &\boldsymbol{w}_1^H \boldsymbol{C}(\boldsymbol{w}_2)\boldsymbol{w}_1 = 0 \quad \text{and} \quad \boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 \geq \sigma_2^2 \mathrm{SINR}_2^\star. &&\text{(8b)}
\end{aligned}$$

The transformation (a) is based on the matrix inverse lemma. The transformation (b) is due to $\|\boldsymbol{w}_1\|^2 = 1$. In the transformation (c), the nonnegative left-hand side of (8a) demands $\boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 \geq \sigma_2^2 \mathrm{SINR}_2^\star$, and $\boldsymbol{C}$ is a Hermitian matrix defined as

$$\boldsymbol{C}(\boldsymbol{w}_2) \triangleq \boldsymbol{H}_{12}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 \boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{12} - (\boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22}\boldsymbol{w}_2 - \sigma_2^2 \mathrm{SINR}_2^\star) \cdot (\sigma_2^2 \boldsymbol{I} + \boldsymbol{H}_{12}^H \boldsymbol{H}_{12}). \tag{9}$$

Then, $\boldsymbol{w}_1$ can be optimized by

$$(\mathrm{P1}) \begin{cases} \displaystyle\max_{\boldsymbol{w}_1 \in \mathcal{W}_{\mathcal{FP}}} & \boldsymbol{w}_1^H \boldsymbol{A}_1(\boldsymbol{w}_2)\boldsymbol{w}_1 \\ \quad\text{s.t.} & {\boldsymbol{w}_1}^H \boldsymbol{C}(\boldsymbol{w}_2)\boldsymbol{w}_1 = 0 \end{cases} \tag{10}$$

where $\boldsymbol{C}(\boldsymbol{w}_2)$ and $\boldsymbol{A}_1(\boldsymbol{w}_2)$ are Hermitian matrices. The problem $(\mathrm{P1})$ is a homogeneous QCQP formulation, where both the objective function and constraints are quadratic without linear terms. It is difficult to solve this non-convex problem.

Note that $\boldsymbol{w}_1^H \boldsymbol{X}\boldsymbol{w}_1 = \mathrm{Tr}(\boldsymbol{X}\boldsymbol{W}_1)$ for any matrix $\boldsymbol{X}$, where $\boldsymbol{W}_1 = \boldsymbol{w}_1\boldsymbol{w}_1^H$ is a rank-one Hermitian positive semidefinite matrix. Thus, $(\mathrm{P1})$ can be transformed to a convex problem by the SDR methods.

$$(\mathrm{P2}) \begin{cases} \displaystyle\max_{\boldsymbol{W}_1 \succeq \boldsymbol{0}} & \mathrm{Tr}\big(\boldsymbol{A}_1(\boldsymbol{w}_2)\boldsymbol{W}_1\big) \\ \quad\text{s.t.} & \mathrm{Tr}\Big(\boldsymbol{C}(\boldsymbol{w}_2)\boldsymbol{W}_1\Big) = 0. \\ & \mathrm{Tr}\big(\boldsymbol{W}_1\big) = 1. \end{cases} \tag{11}$$

Observe that this convex problem is solvable (see the Appendix D). It is easy to obtain the optimal solution $\boldsymbol{W}_1^\star$ by a convex optimization toolbox, e.g., SeDuMi [20].

Therefore, we can construct a tight optimal rank-one solution to $(\mathrm{P1})$ by

$$\boldsymbol{w}_1 = \begin{cases} \boldsymbol{u}_1(\boldsymbol{W}_1^\star), & \text{if } \ \mathrm{Rank}(\boldsymbol{W}_1^\star) = 1, \\ \mathcal{RD}\big(\boldsymbol{W}_1^\star, \boldsymbol{C}(\boldsymbol{w}_2), \boldsymbol{A}_1(\boldsymbol{w}_2), \boldsymbol{I}\big), & \text{if } \ \mathrm{Rank}(\boldsymbol{W}_1^\star) \geq 2 \text{ and } N_T \geq 3. \end{cases} \tag{12}$$

where $\mathcal{RD}$ denotes the function of matrix rank-one decomposition [19].

B. Optimization of TX_2

For a given *feasible* $\boldsymbol{w}_1$, $(\mathrm{P0})$ becomes another single-beamformer optimization problem with respect to $\boldsymbol{w}_2$. Maximization of its objective function is

$$\begin{aligned} & \max_{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}} \quad \boldsymbol{w}_1^H \boldsymbol{H}_{11}^H \big(\sigma_1^2 \boldsymbol{I} + \boldsymbol{H}_{21} \boldsymbol{w}_2 \boldsymbol{w}_2^H \boldsymbol{H}_{21}^H\big)^{-1} \boldsymbol{H}_{11} \boldsymbol{w}_1 \\ \Longleftrightarrow & \max_{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}} \quad \frac{1}{\sigma_1^2} \cdot \left(\boldsymbol{w}_1^H \boldsymbol{H}_{11}^H \boldsymbol{H}_{11} \boldsymbol{w}_1 - \frac{|\boldsymbol{w}_1^H \boldsymbol{H}_{11}^H \boldsymbol{H}_{21} \boldsymbol{w}_2|^2}{\sigma_1^2 \boldsymbol{I} + {\boldsymbol{w}_2}^H \boldsymbol{H}_{21}^H \boldsymbol{H}_{21} \boldsymbol{w}_2} \right) \\ \Longleftrightarrow & \min_{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}} \quad \frac{|\boldsymbol{w}_1^H \boldsymbol{H}_{11}^H \boldsymbol{H}_{21} \boldsymbol{w}_2|^2}{\sigma_1^2 \boldsymbol{I} + {\boldsymbol{w}_2}^H \boldsymbol{H}_{21}^H \boldsymbol{H}_{21} \boldsymbol{w}_2} \\ \Longleftrightarrow & \min_{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}} \quad \frac{{\boldsymbol{w}_2}^H \boldsymbol{C}_1(\boldsymbol{w}_1) \boldsymbol{w}_2}{\boldsymbol{w}_2^H \boldsymbol{C}_2 \boldsymbol{w}_2} \end{aligned} \tag{13}$$

where $\boldsymbol{C}_1(\boldsymbol{w}_1) \triangleq \boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1 \boldsymbol{w}_1^H \boldsymbol{H}_{11}^H \boldsymbol{H}_{21}$ and $\boldsymbol{C}_2 \triangleq \sigma_1^2 \boldsymbol{I} + \boldsymbol{H}_{21}^H \boldsymbol{H}_{21}$ are Hermitian matrices.

Then, $\boldsymbol{w}_2$ can be optimized by

$$(\mathrm{P3}) \begin{cases} \displaystyle \min_{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}} & \dfrac{{\boldsymbol{w}_2}^H \boldsymbol{C}_1(\boldsymbol{w}_1) \boldsymbol{w}_2}{\boldsymbol{w}_2^H \boldsymbol{C}_2 \boldsymbol{w}_2} \\ \quad \text{s.t.} & \boldsymbol{w}_2^H \boldsymbol{A}_2(\boldsymbol{w}_1) \boldsymbol{w}_2 = \mathrm{SINR}_2^\star. \end{cases} \tag{14}$$

Observe that $(\mathrm{P3})$ is a fractional QCQP problem. It becomes the following SDR problem

$$(\mathrm{P4}) \begin{cases} \displaystyle \min_{\boldsymbol{W}_2 \succeq \boldsymbol{0}} & \dfrac{\mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1) \boldsymbol{W}_2\big)}{\mathrm{Tr}\big(\boldsymbol{C}_2 \boldsymbol{W}_2\big)} \\ \quad \text{s.t.} & \mathrm{Tr}\big(\boldsymbol{A}_2(\boldsymbol{w}_1) \boldsymbol{W}_2\big) = \mathrm{SINR}_2^\star \\ & \mathrm{Tr}\big(\boldsymbol{W}_2\big) = 1, \end{cases} \tag{15}$$

which is still a non-convex problem. Fortunately, the fractional structure can be removed by a variation of the Charnes-Cooper variable transformation [21], which has been used in [22]. Define the transformed variable $\boldsymbol{Q} = s\boldsymbol{W}_2$ with $s = \frac{1}{\mathrm{Tr}\left(\boldsymbol{C}_2\boldsymbol{W}_2\right)}$. Then, $(\mathrm{P4})$ becomes

$$(\mathrm{P5})\begin{cases} \min\limits_{\boldsymbol{Q},\ s} & \mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{Q}\big) \\ \text{s.t.} & \mathrm{Tr}\big(\boldsymbol{A}_2(\boldsymbol{w}_1)\boldsymbol{Q}\big) = s \cdot \mathrm{SINR}_2^{\star}. \\ & \mathrm{Tr}\big(\boldsymbol{C}_2\boldsymbol{Q}\big) = 1 \\ & \mathrm{Tr}\big(\boldsymbol{Q}\big) = s \\ & \boldsymbol{Q} \succeq \boldsymbol{0},\ \dfrac{1}{\lambda_1(\boldsymbol{C}_2)} \leq s \leq \dfrac{1}{\lambda_N(\boldsymbol{C}_2)}. \end{cases} \tag{16}$$

which is a standard SDR problem with two variables $\boldsymbol{Q}$ and s. We obtain the optimal solution $\boldsymbol{W}_2^{\star} = \frac{\boldsymbol{Q}_2^{\star}}{s^{\star}}$ to $(\mathrm{P4})$ (see the Appendix E).

Therefore, a tight optimal rank-one solution to $(\mathrm{P3})$ is constructed by

$$\boldsymbol{w}_2 = \begin{cases} \boldsymbol{u}_1(\boldsymbol{W}_2^{\star}), & \text{if } \ \mathrm{Rank}(\boldsymbol{W}_2^{\star}) = 1, \\ \mathcal{RD}\big(\boldsymbol{W}_2^{\star}, \boldsymbol{C}_1(\boldsymbol{w}_1), \boldsymbol{A}_2(\boldsymbol{w}_1), \boldsymbol{C}_2, \boldsymbol{I}\big), & \text{if } \ \mathrm{Rank}(\boldsymbol{W}_2^{\star}) \geq 2 \text{ and } N_T \geq 3. \end{cases} \tag{17}$$

C. Algorithm

Based on the above optimization, we propose an iterative algorithm to solve $(\mathrm{P0})$ by optimizing $\boldsymbol{w}_1$ and $\boldsymbol{w}_2$ alternately. We call this algorithm iterative alternating algorithm (IAA), which contains four steps: $Step.1$ Set an initial feasible $\boldsymbol{w}_2$ for $(\mathrm{P0})$. $Step.2$ Optimize $(\mathrm{P0})$ with respect to $\boldsymbol{w}_1$ by fixing $\boldsymbol{w}_2$. $Step.3$ Optimize $(\mathrm{P0})$ with respect to $\boldsymbol{w}_2$ by fixing $\boldsymbol{w}_1$. $Step.4$ Repeat $Step.2-3$ until this algorithm converges. As mentioned above, a feasible initialization of $\boldsymbol{w}_2$ for $(\mathrm{P0})$ is required, which will be discussed in the following.

*1) **Initialization:*** A feasible initial $\boldsymbol{w}_2$ for optimization of TX_1 can be obtained as follows.

Proposition 4 *For a given* $\mathrm{SINR}_2^{\star} \in (2^{\underline{R}_2} - 1, 2^{\overline{R}_2} - 1)$, $(\boldsymbol{w}_1, \boldsymbol{w}_2)$ *is always a feasible solution pair to* $(\mathrm{P0})$ *if* $\boldsymbol{w}_1 \in \mathcal{W}_{\mathcal{FP}}$, $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{F}}$ *with*

$$\mathcal{W}_{\mathcal{F}} \triangleq \Big\{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}} : \boldsymbol{w}_2^H\boldsymbol{H}_{22}^H\boldsymbol{H}_{22}\boldsymbol{w}_2 \geq \sigma_2^2\mathrm{SINR}_2^{\star},\ \lambda_1\big(\boldsymbol{C}(\boldsymbol{w}_2)\big)\cdot\lambda_N\big(\boldsymbol{C}(\boldsymbol{w}_2)\big) \leq 0\Big\}, \tag{18}$$

where $\boldsymbol{C}(\boldsymbol{w}_2)$ *is in (9).* □

Proof: See Appendix F. ■

Note that $\mathcal{W}_{\mathcal{F}}$ is always nonempty because $\mathrm{SINR}_2(\boldsymbol{w}_1, \boldsymbol{w}_2) = \mathrm{SINR}_2^{\star}$ with $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{F}}$ always corresponds to a straight line in the rate region. Therefore, the problem $(\mathrm{P1})$, derived from $(\mathrm{P0})$ with fixed $\boldsymbol{w}_2$ in $\mathcal{W}_{\mathcal{F}}$, always has at least one solution $\boldsymbol{w}_1$ in $\mathcal{W}_{\mathcal{FP}}$ by (12).

Remark 1 *It is worth to note that the performance of the IAA depends significantly on the initialization. Therefore, how to find a good initialization leading to a good/robust performance is studied as follows.*

In the two-user MISO IC, all possible strict Pareto-optimal beamformers can be characterized by linear combinations of ZF and MRT beamformers in [2]. A heuristical idea is to extend this parameterization for the MISO case to our MIMO case by balancing the "egoistic" strategy and "altruistic" strategy as

$$\boldsymbol{w}_i(\xi_{i,1}, \xi_{i,2}) = \overrightarrow{\xi_{i,1}\boldsymbol{w}_i^{Ego} + \xi_{i,2}\boldsymbol{w}_i^{Alt}}, \qquad i = 1, 2, \tag{19}$$

where $\xi_{i,1}$ and $\xi_{i,2}$ are complex-valued parameters satisfying $|\xi_{i,1}| + |\xi_{i,2}| = 1$.

Unfortunately, the illustrations in Section V show that this characterization cannot achieve the whole strict Pareto boundary for the MIMO IC but still has a promising performance. To improve the efficiency of the initialization, we set an initial $\boldsymbol{w}_2$ by the following parameterization with real-valued parameters

$$\boldsymbol{w}_2 = \overrightarrow{\zeta \cdot \boldsymbol{w}_2^{Ego} + (1-\zeta) \cdot \boldsymbol{w}_2^{Alt}}, \tag{20}$$

where $\zeta = \frac{R_2^\star - \underline{R}_2}{\overline{R}_2 - \underline{R}_2}$ denotes the proportion of the "egoistic" strategy. If $\boldsymbol{w}_2 \notin \mathcal{W}_{\mathcal{F}}$, we reset $\zeta \in \frac{R_2^\star - \underline{R}_2}{\overline{R}_2 - \underline{R}_2} + [-\nu, \nu]$ with $0 < \nu \leq \min\left\{\frac{R_2^\star - \underline{R}_2}{\overline{R}_2 - \underline{R}_2}, \frac{\overline{R}_2 - R_2^\star}{\overline{R}_2 - \underline{R}_2}\right\}$ until $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{F}}$. If we still cannot find a feasible $\boldsymbol{w}_2$ for all the ν, we use a random $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{F}}$ directly.

The later simulations in Section V imply this proposed initialization is a good candidate for the IAA.$\square$

*2) **Convergence**:* We repeat the optimization of TX_1 and TX_2 alternatively until a certain convergence criterion is satisfied, e.g., $|R_1^{(l)} - R_1^{(l-1)}| \leq \epsilon$ with l and ϵ as index of iteration and the accuracy, respecitvely. Since R_1 is bounded by $(0, \overline{R}_1)$ and monotonically increases in each iteration, convergence of R_1 is guaranteed. Finally, we obtain a convergent operating point $(R_1^{(l)}, R_2^\star)$ with its associated transmit beamformer pair $(\boldsymbol{w}_1^{(l)}, \boldsymbol{w}_2^{(l)})$. However, it remains unknown how close a convergent point $(R_1^{(l)}, R_2^\star)$ is to the strict Pareto-optimal point $(R_1^\star, R_2^\star)$ (global optimality). Numerical simulations in Section V show that the IAA has a better performance to illustrate the strict Pareto boundary compared with the existing methods.

*3) **Algorithm in Pseudo-Code**:* The outline of the proposed IAA is described in pseudo-code as Algorithm 1:

*4) **Distributed Implementation**:* For the purpose of distributed implementation, we make two reasonable assumptions (similar to [12]). First, we assume that local CSI is available for each transmitter, namely, the transmitter TX_k knows the local channel matrices $\boldsymbol{H}_{ki}$ to the receivers $\mathrm{RX}_i, i = 1, 2$. The

Algorithm 1 Iterative Alternating Algorithm (IAA)

```
Input: $\boldsymbol{w}_2^{Alt}$, $\boldsymbol{w}_2^{Ego}$, an arbitrary $R_2^\star \in \big(\underline{R}_2, \overline{R}_2\big)$, and $\mathrm{SINR}_2^\star = 2^{R_2^\star} - 1$.
Output: A convergent operating point $(R_1^{(l)}, R_2^\star)$ and its associated strategy $(\boldsymbol{w}_1^{(l)}, \boldsymbol{w}_2^{(l)})$.
begin
    Initialization: Set a feasible $\boldsymbol{w}_2^{(0)} \in \mathcal{W}_{\mathcal{F}}$, $l = 0$.
    while some convergence criterion is not satisfied do
        $l++$.
        Obtain an optimal solution $\boldsymbol{W}_1$ by solving the SDR problem $(\mathrm{P2})$.
        if $\mathrm{Rank}(\boldsymbol{W}_1) = 1$ then
            perform eigen-decomposition $\boldsymbol{w}_1^{(l)} = \boldsymbol{u}_1(\boldsymbol{W}_1)$;
        else
            perform matrix rank-one decomposition $\boldsymbol{w}_1^{(l)} = \mathcal{RD}\big(\boldsymbol{W}_1, \boldsymbol{A}_1(\boldsymbol{w}_2^{(l-1)}), \boldsymbol{C}(\boldsymbol{w}_2^{(l-1)}), \boldsymbol{I}\big)$.
        Obtain an optimal solution $(\boldsymbol{Q}, s)$ by solving the SDR problem $(\mathrm{P5})$. Set $\boldsymbol{W}_2 = \frac{\boldsymbol{Q}}{s}$.
        if $\mathrm{Rank}(\boldsymbol{W}_2) = 1$ then
            perform eigen-decomposition $\boldsymbol{w}_2^{(l)} = \boldsymbol{u}_1(\boldsymbol{W}_2)$;
        else
            perform matrix rank-one decomposition $\boldsymbol{w}_2^{(l)} = \mathcal{RD}\big(\boldsymbol{W}_2, \boldsymbol{C}_1(\boldsymbol{w}_1^{(l)}), \boldsymbol{A}_2(\boldsymbol{w}_1^{(l)}), \boldsymbol{C}_2, \boldsymbol{I}\big)$.
        Compute the rate of link $\mathrm{TX}_1 \mapsto \mathrm{RX}_1$: $R_1^{(l)} = \log_2\big(1 + \boldsymbol{w}_1^{(l),H} \boldsymbol{A}_1(\boldsymbol{w}_2^{(l)}) \boldsymbol{w}_1^{(l)}\big)$.
```

second assumption is that there exists an additional channel between the TX_1 and TX_2 for information exchange. Under these two assumptions, the proposed IAA can be implemented in a distributed fashion.

More precisely, for the optimization of TX_1, TX_1 estimates the local channel matrices $\boldsymbol{H}_{11}$ and $\boldsymbol{H}_{12}$ and also needs the updated information (i.e., two vectors $\boldsymbol{H}_{21}\boldsymbol{w}_2$ and $\boldsymbol{H}_{22}\boldsymbol{w}_2$ and two scalars σ_2^2 and $\mathrm{SINR}_2^\star$) from TX_2 via the additional channel between the transmitters. For the optimization of TX_2, TX_2 also needs the local channel matrices $\boldsymbol{H}_{22}, \boldsymbol{H}_{21}$ and the feedback (i.e., two vectors $\boldsymbol{H}_{11}\boldsymbol{w}_1$ and $\boldsymbol{H}_{12}\boldsymbol{w}_1$ and a scalar σ_1^2) from TX_1. Furthermore, it is easy to stop the iteration when the termination criterion of the IAA is satisfied at TX_1.

Although the distributed implementation of the IAA needs information exchange, the exchange is only required between the transmitters (e.g., BSs for the downlink). This reduces the computation requirements at the receivers (e.g., MSs for the downlink).

V. ILLUSTRATIONS

To illustrate the achievable rate region of the proposed algorithm, we consider a two-user Gaussian MIMO IC, where $N_T = 3$ and $N_R = 2$. The transmit power budget is set to 1 for the two users, and noise power $\sigma_1^2 = \sigma_2^2 = 10^{-\frac{\mathrm{SNR}}{10}}$ where SNR=10dB. The channels are

$$\boldsymbol{H}_{11} = \begin{pmatrix} -0.3034 + 1.9096i & -0.3790 + 0.4201i & 0.0357 + 0.7337i \\ -0.6358 - 0.8030i & -0.7881 - 0.1273i & 0.7534 + 0.8348i \end{pmatrix},$$

$$\boldsymbol{H}_{12} = \begin{pmatrix} -0.6758 + 0.1040i & -0.5949 - 0.0344i & 0.4311 + 0.9658i \\ -2.1621 + 0.5404i & -0.0037 + 0.6627i & 0.8611 + 1.2318i \end{pmatrix},$$

$$\boldsymbol{H}_{21} = \begin{pmatrix} 0.3999 + 0.1567i & 0.3798 - 0.5619i & -0.1005 + 0.2836i \\ -0.5494 - 0.4648i & 1.1971 - 0.5297i & -0.7271 + 0.2114i \end{pmatrix},$$

$$\boldsymbol{H}_{22} = \begin{pmatrix} -0.0308 - 0.1133i & 0.0433 - 0.3313i & 0.3047 - 1.2157i \\ -1.4947 - 1.8676i & -0.9430 + 0.5704i & -1.3328 + 1.4638i \end{pmatrix}.$$

Fig. 1 shows the performance of the IAA by different initializations. For a given $R_2^\star = \underline{R_2} + \frac{11}{20} \cdot (\overline{R_2} - \underline{R_2}) = 6.2898$ (far away from the turning points), Fig. 1a shows that the achieved R_1 with initialization by (20) is greater than that with random initializations except for 8 out of 200 random initializations. For a given $R_2^\star = \underline{R_2} + \frac{2}{20} \cdot (\overline{R_2} - \underline{R_2}) = 5.6398$ (close to a turning point), Fig. 1b shows that the achieved R_1 with initialization by (20) always outperforms the case with 200 random initializations. Therefore, numerical simulations show that the IAA with initialization by (20) has a good performance.

Fig. 2 illustrates the achievable boundary by the proposed IAA compared with the existing methods. The term ”IAA_10rand” denotes the best result obtained by running the IAA with 9 randomly chosen initializations and 1 initialization by (20). The SINR targets are $\mathrm{SINR}_2^\star = 2^{R_2^\star}$s where $R_2^\star = \underline{R_2} + \frac{n}{50} \cdot (\overline{R_2} - \underline{R_2}),\ n = 1, 2, ..., 49$. The term ”WMMSE_10rand” is defined with 10 randomly chosen initializations. The weighted sum rate used in ”WMMSE_10rand” is expressed as $w \cdot R_1 + (1 - w) \cdot R_2$ with the weights ws in $[0.05 : 0.05 : 0.95]$. The curve denoted by ”RandBeam_10mil” means the outermost boundary of the rate region achieved by 10 million random normalized transmit beamformers (Each receiver is fixed as the MMSE receiver). The term ”SimpleReceiver” is the outermost boundary of the region achieved by [5] where each receiver is fixed as the largest left singular vector of each corresponding direct channel matrix. The curve denoted by ”Eq.(19)” is the outermost boundary of the achieved region by (19) with complex-valued parameters. The boundary of ”Eq.(20)” illustrates (20) with $\zeta = \frac{n-1}{N},\ n = 1, ..., N+1$ where $N = 100$.

It can be observed that the proposed IAA and the WMMSE yield a similar performance at convex parts of boundary and outperform the others under the same accuracy for convergence. However, since the WMMSE in [9] is a weighted sum-rate maximization method, it cannot achieve those operating points of the non-convex boundary. This might be why there is no operating points achieved between the points P_1 and P_2 by in Fig. 2. In addition, the performance of the ”IAA_10rand” cannot be affected significantly by the number of random initializations from Fig. 1.

To further evaluate the performance of ”WMMSE_10rand” and ”IAA_10rand” on illustrating the Pareto boundary, another simulation is done and shown in Fig. 3. Even with fine weights ws in $[0.05 : 0.005 : 0.95]$, we find there exists a large jump between the points P_3 and P_4 by ”WMMSE_10rand” so that the rate region cannot be illustrated effectively. For ”IAA_10rand”, although there is no guarantee to say that its corresponding curve is the strict Pareto boundary, it can serve as a good lower bound for the strict Pareto boundary.

VI. CONCLUSIONS

In this paper, we study an open topic on the Pareto boundary of the rate region for the two-user single-beam MIMO IC. The turning points and the weak Pareto boundary can be computed exactly. For computation of a strict Pareto-optimal point, our proposed IAA converges to an suboptimal operating point. The merit of this algorithm is that it can achieve any operating point with a given rate constraint. Thus, it can be applied to the optimization problem with a rate constraint (e.g. rate requirement of primary link in underlay cognitive radio environments or for private messages), and it can illustrate the rate region effectively compared with the existing methods.

APPENDIX

A. Proof of Proposition 1

Proof: Given beamformers $\boldsymbol{w_1}$ and $\boldsymbol{w_2}$, according to the matrix inversion lemma [23], (2) can be rewritten as:

$$\begin{aligned}
\mathrm{SINR}_1(\boldsymbol{w}_1,\boldsymbol{w}_2) &= \big(\boldsymbol{H}_{11}\boldsymbol{w}_1\big)^H\bigg(\frac{1}{\sigma_1^2}\boldsymbol{I}-\frac{\boldsymbol{H}_{21}\boldsymbol{w}_2(\boldsymbol{H}_{21}\boldsymbol{w}_2)^H}{\sigma_1^2(\sigma_1^2+\|\boldsymbol{H}_{21}\boldsymbol{w}_2\|^2)}\bigg)\boldsymbol{H}_{11}\boldsymbol{w}_1\\
&= \frac{\|\boldsymbol{H}_{11}\boldsymbol{w}_1\|^2}{\sigma_1^2}-\frac{\big|(\boldsymbol{H}_{11}\boldsymbol{w}_1)^H\boldsymbol{H}_{21}\boldsymbol{w}_2\big|^2}{\sigma_1^2(\sigma_1^2+\|\boldsymbol{H}_{21}\boldsymbol{w}_2\|^2)}\\
&= \frac{\|\boldsymbol{H}_{11}\boldsymbol{w}_1\|^2}{\sigma_1^2}\cdot\Big(1-\frac{\big|\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}^H\cdot\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}\big|^2\cdot\|\boldsymbol{H}_{21}\boldsymbol{w}_2\|^2}{\sigma_1^2+\|\boldsymbol{H}_{21}\boldsymbol{w}_2\|^2}\Big)\\
&= \Big(1-\big|\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}^H\cdot\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}\big|^2\Big)\cdot\frac{\|\boldsymbol{H}_{11}\boldsymbol{w}_1\|^2}{\sigma_1^2}+\big|\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}^H\cdot\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}\big|^2\cdot\frac{\|\boldsymbol{H}_{11}\boldsymbol{w}_1\|^2}{\sigma_1^2+\|\boldsymbol{H}_{21}\boldsymbol{w}_2\|^2}.
\end{aligned}\tag{21}$$

For two complex vectors $\boldsymbol{a}$ and $\boldsymbol{b}$, the cosine of the complex-valued angle between $\boldsymbol{a}$ and $\boldsymbol{b}$ is defined as [24]:

$$\cos(\theta_C)=\frac{\boldsymbol{a}^H\boldsymbol{b}}{\|\boldsymbol{a}\|\cdot\|\boldsymbol{b}\|},$$

where $\cos(\theta_C)=\mu e^{j\psi}$ with $\mu=|\cos(\theta_C)|\leq 1$ and $-\pi\leq\theta_C\leq\pi$ is called pseudo angle between $\boldsymbol{a}$ and $\boldsymbol{b}$.

The Hermitian angle between $\boldsymbol{a}$ and $\boldsymbol{b}$ is defined as

$$\cos(\theta_H)=|\cos(\theta_C)|=\frac{|\boldsymbol{a}^H\boldsymbol{b}|}{\|\boldsymbol{a}\|\cdot\|\boldsymbol{b}\|},\quad 0\leq\theta_H\leq\pi/2.$$

It implies $\big|\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}^H\cdot\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}\big|^2=\cos^2(\theta_{H,1})$ because of $\big\|\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}\big\|^2=\big\|\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}\big\|^2=1$. Thus, (21) becomes

$$\mathrm{SINR}_1(\boldsymbol{w}_1,\boldsymbol{w}_2)=\sin^2(\theta_{H,1})\cdot\frac{\|\boldsymbol{H}_{11}\boldsymbol{w}_1\|^2}{\sigma_1^2}+\cos^2(\theta_{H,1})\cdot\frac{\|\boldsymbol{H}_{11}\boldsymbol{w}_1\|^2}{\sigma_1^2+\|\boldsymbol{H}_{21}\boldsymbol{w}_2\|^2},$$

where $\theta_{H,1}\in[0,\pi/2]$ denotes the Hermitian angle between the desired signal direction $\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}$ and the interference direction $\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}$ at RX_1. Obviously, when $\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}\parallel\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}$ (or $\overrightarrow{\boldsymbol{H}_{11}\boldsymbol{w}_1}\perp\overrightarrow{\boldsymbol{H}_{21}\boldsymbol{w}_2}$), we have $\theta_{H,1}=0$ (or $\theta_{H,1}=\pi/2$). ■

B. *Proof of Proposition 2*

Proof: Our idea is to show that it is impossible for an strict Pareto-optimal point achieved by the transmit beamformers with less than full power. Therefore, the proof works by contradiction.

Assume that an operating point $\big(R_1(\boldsymbol{w}_1,\boldsymbol{w}_2),R_2(\boldsymbol{w}_1,\boldsymbol{w}_2)\big)$ on the strict Pareto boundary is achieved by $\|\boldsymbol{w}_1\|^2<1$ and $\|\boldsymbol{w}_2\|^2\leq 1$. We consider whether there exists an *outer* point $\big(R_1(\hat{\boldsymbol{w}}_1,\boldsymbol{w}_2),R_2(\hat{\boldsymbol{w}}_1,\boldsymbol{w}_2)\big)$ achieved by $\|\boldsymbol{w}_1\|^2<\|\hat{\boldsymbol{w}}_1\|^2\leq 1$ and $\|\boldsymbol{w}_2\|^2\leq 1$. If an *outer* point exists, e.g., $R_1(\hat{\boldsymbol{w}}_1,\boldsymbol{w}_2)>R_1(\boldsymbol{w}_1,\boldsymbol{w}_2)$ and $R_2(\hat{\boldsymbol{w}}_1,\boldsymbol{w}_2)=R_2(\boldsymbol{w}_1,\boldsymbol{w}_2)$, we can improve the $R_1(\boldsymbol{w}_1,\boldsymbol{w}_2)$ only by more transmit power while keeping $R_2(\boldsymbol{w}_1,\boldsymbol{w}_2)$ unchanged. Thus, the existence of an *outer* operating point contradicts the assumption that $\big(R_1(\boldsymbol{w}_1,\boldsymbol{w}_2),R_2(\boldsymbol{w}_1,\boldsymbol{w}_2)\big)$ is a strict Pareto-optimal point.

That is, we need to show the existence of a nonzero perturbation vector $\boldsymbol{\delta}_p$ satisfying:

$$(\boldsymbol{w}_1+\boldsymbol{\delta}_p)^H\boldsymbol{A}_1(\boldsymbol{w}_2)(\boldsymbol{w}_1+\boldsymbol{\delta}_p)>\boldsymbol{w}_1^H\boldsymbol{A}_1(\boldsymbol{w}_2)\boldsymbol{w}_1 \tag{23a}$$

$$\boldsymbol{w}_2^H\boldsymbol{A}_2(\boldsymbol{w}_1+\boldsymbol{\delta}_p)\boldsymbol{w}_2=\boldsymbol{w}_2^H\boldsymbol{A}_2(\boldsymbol{w}_1)\boldsymbol{w}_2 \tag{23b}$$

$$\|\boldsymbol{w}_1+\boldsymbol{\delta}_p\|^2>\|\boldsymbol{w}_1\|^2 \tag{23c}$$

$$\|\boldsymbol{w}_1+\boldsymbol{\delta}_p\|^2\leq 1. \tag{23d}$$

An arbitrary nonzero $\boldsymbol{\delta}_p$ can be expressed as

$$\boldsymbol{\delta}_p=\|\boldsymbol{\delta}_p\|\cdot e^{j\phi_\delta}\cdot\overrightarrow{\boldsymbol{\delta}_p}. \tag{24}$$

It means that we should find $\|\boldsymbol{\delta}_p\|$, ϕ_δ and $\overrightarrow{\boldsymbol{\delta}_p}$ to satisfy all the conditions in (23) simultaneously. The proof of the existence of ϕ_δ is similar to that for the two-user MISO IC in [1]. However, it is more difficult to find a $\overrightarrow{\boldsymbol{\delta}_p}$ for the MIMO IC because the cross-talk channel matrix (rather than a vector in the MISO IC case) does not always have a null space for $\overrightarrow{\boldsymbol{\delta}_p}$. We give the proof in detail as follows.

1. Existence of $\overrightarrow{\boldsymbol{\delta}_p}$

By the matrix inverse lemma [23], the condition in (23b) is equivalent to

$$\frac{|(\boldsymbol{w}_1+\boldsymbol{\delta}_p)^H\boldsymbol{H}_{12}^H\boldsymbol{H}_{22}\boldsymbol{w}_2|^2}{\sigma_2^2+\|\boldsymbol{H}_{12}(\boldsymbol{w}_1+\boldsymbol{\delta}_p)\|^2}=\frac{|\boldsymbol{w}_1^H\boldsymbol{H}_{12}^H\boldsymbol{H}_{22}\boldsymbol{w}_2|^2}{\sigma_2^2+\|\boldsymbol{H}_{12}\boldsymbol{w}_1\|^2}. \tag{25}$$

It is difficult to solve $\boldsymbol{\delta}_p$ directly. In fact, we only need to prove the existence of $\boldsymbol{\delta}_p$ satisfying (25).

Case 1. $N_R<N_T$ or $\mathrm{Rank}(\boldsymbol{H}_{12})<N_T\leq N_R$:

We always have $\boldsymbol{H}_{12}\boldsymbol{\delta}_p = \boldsymbol{0}$ if

$$\overrightarrow{\boldsymbol{\delta}_p} = \sum_{i=1}^{\mathrm{Rank}(\Pi^{\perp}_{\boldsymbol{H}_{12}^T})} a_i \boldsymbol{u}_i(\Pi^{\perp}_{\boldsymbol{H}_{12}^T}), \tag{26}$$

where $a_i, i = 1, ..., \mathrm{Rank}(\Pi^{\perp}_{\boldsymbol{H}_{12}^T})$ are complex-valued numbers and $\sum_{i=1}^{\mathrm{Rank}(\Pi^{\perp}_{\boldsymbol{H}_{12}^T})} |a_i|^2 = 1$. Then, (25) always holds because any $\boldsymbol{\delta}_p$ in the null space of the cross-talk channel $\boldsymbol{H}_{12}$ does not cause extra interference to RX_2.

Case 2. $\mathrm{Rank}(\boldsymbol{H}_{12}) = N_T \leq N_R$:

It is impossible to nullify the perturbation directly as Case 1. Define $\boldsymbol{v}_1 \triangleq \boldsymbol{H}_{12}\boldsymbol{w}_1$, $\boldsymbol{v}_\delta \triangleq \boldsymbol{H}_{12}\boldsymbol{\delta}_p$ and $\boldsymbol{v}_2 \triangleq \boldsymbol{H}_{22}\boldsymbol{w}_2$. Then (25) becomes

$$\frac{|(\boldsymbol{v}_1 + \boldsymbol{v}_\delta)^H \boldsymbol{v}_2|^2}{\sigma_2^2 + \|\boldsymbol{v}_1 + \boldsymbol{v}_\delta\|^2} = \frac{|\boldsymbol{v}_1^H \boldsymbol{v}_2|^2}{\sigma_2^2 + \|\boldsymbol{v}_1\|^2}. \tag{27}$$

Assume that $\boldsymbol{v}_\delta$ is a combination of two orthogonal vectors

$$\boldsymbol{v}_\delta \triangleq \|\boldsymbol{v}_\delta\| \cdot \left(\sqrt{\eta} \cdot \overrightarrow{\Pi^{\perp}_{\boldsymbol{v}_2}\boldsymbol{v}_1} + \sqrt{1-\eta} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2}\boldsymbol{v}_1}\right), \tag{28}$$

Note that $\overrightarrow{\Pi_{\boldsymbol{v}_2}\boldsymbol{v}_1} = \overrightarrow{\boldsymbol{v}_2} \cdot e^{-j\phi_1}$ where $\phi_1 = \arg(\boldsymbol{v}_1^H \boldsymbol{v}_2)$. Now, it remains to find whether there is a $\boldsymbol{v}_\delta$ in the plane spanned by $\overrightarrow{\Pi^{\perp}_{\boldsymbol{v}_2}\boldsymbol{v}_1}$ and $\overrightarrow{\Pi_{\boldsymbol{v}_2}\boldsymbol{v}_1}$ satisfying (27).

Substituting (28) into (27) yields

$$\frac{\left|\boldsymbol{v}_1^H \boldsymbol{v}_2 + \|\boldsymbol{v}_\delta\| \cdot \sqrt{1-\eta} \cdot e^{j\phi_1} \cdot \|\boldsymbol{v}_2\|\right|^2}{\sigma_2^2 + \left\|\boldsymbol{v}_1 + \|\boldsymbol{v}_\delta\| \cdot \left(\sqrt{\eta} \cdot \overrightarrow{\Pi^{\perp}_{\boldsymbol{v}_2}\boldsymbol{v}_1} + \sqrt{1-\eta} \cdot e^{-j\phi_1} \cdot \overrightarrow{\boldsymbol{v}_2}\right)\right\|^2} = \frac{|\boldsymbol{v}_1^H \boldsymbol{v}_2|^2}{\sigma_2^2 + \|\boldsymbol{v}_1\|^2}. \tag{29}$$

Define the right-hand side and the left-hand side of (29) as R_{side} and $L_{side}(\eta)$, respectively. It is still hard to get a closed-form solution of η by solving (29) directly. Observe that the denominator of $L_{side}(\eta)$ is always positive for $\eta \in [0, 1]$, and $L_{side}(\eta)$ as a function of η is continuous over the interval $[0, 1]$. Therefore, if $(R_{side} - L_{side}(1))(R_{side} - L_{side}(0)) \leq 0$, there must exist a $\boldsymbol{v}_\delta(\eta)$ with some $\eta \in [0, 1]$ satisfying (29).

When $\eta = 1$, the term $L_{side}(\eta)$ becomes

$$L_{side}(1) = \frac{|\boldsymbol{v}_1^H \boldsymbol{v}_2|^2}{\sigma_2^2 + \left\|\boldsymbol{v}_1 + \|\boldsymbol{v}_\delta\| \cdot \overrightarrow{\Pi^{\perp}_{\boldsymbol{v}_2}\boldsymbol{v}_1}\right\|^2} = \frac{|\boldsymbol{v}_1^H \boldsymbol{v}_2|^2}{\sigma_2^2 + \|\boldsymbol{v}_1\|^2 + \|\boldsymbol{v}_\delta\|^2 + 2\|\boldsymbol{v}_\delta\| \cdot \|\Pi^{\perp}_{\boldsymbol{v}_2}\boldsymbol{v}_1\|}.$$

Observe that $\|\boldsymbol{v}_\delta\|^2 + 2\|\boldsymbol{v}_\delta\| \cdot \|\Pi^{\perp}_{\boldsymbol{v}_2}\boldsymbol{v}_1\| > 0$. Thus, we have $L_{side}(1) < R_{side}$.

When $\eta = 0$, the term $L_{side}(\eta)$ becomes

$$L_{side}(0) = \frac{\left|\boldsymbol{v}_1^H \boldsymbol{v}_2 + \|\boldsymbol{v}_\delta\| \cdot e^{j\phi_1} \cdot \|\boldsymbol{v}_2\|\right|^2}{\sigma_2^2 + \|\boldsymbol{v}_1 + \|\boldsymbol{v}_\delta\| \cdot e^{-j\phi_1} \cdot \overrightarrow{\boldsymbol{v}_2}\|^2} = \frac{|\boldsymbol{v}_1^H \boldsymbol{v}_2|^2 + \|\boldsymbol{v}_2\|^2 \cdot (\|\boldsymbol{v}_\delta\|^2 + 2\|\boldsymbol{v}_\delta\| \cdot |\boldsymbol{v}_1^H \overrightarrow{\boldsymbol{v}_2}|)}{\sigma_2^2 + \|\boldsymbol{v}_1\|^2 + (\|\boldsymbol{v}_\delta\|^2 + 2\|\boldsymbol{v}_\delta\| \cdot |\boldsymbol{v}_1^H \overrightarrow{\boldsymbol{v}_2}|)},$$

where $\|\boldsymbol{v}_\delta\|^2 + 2 \cdot \|\boldsymbol{v}_\delta\| \cdot |\boldsymbol{v}_1^H \overrightarrow{\boldsymbol{v}_2}| > 0$. If $L_{side}(0) > R_{side}$, we need $\|\boldsymbol{v}_2\|^2 > R_{side}$. Furthermore, R_{side} is bounded by

$$R_{side} = \frac{|\boldsymbol{v}_1^H \boldsymbol{v}_2|^2}{\sigma_2^2 + \|\boldsymbol{v}_1\|^2} \leq \frac{\|\boldsymbol{v}_1\|^2 \cdot \|\boldsymbol{v}_2\|^2}{\sigma_2^2 + \|\boldsymbol{v}_1\|^2} = \frac{\|\boldsymbol{v}_2\|^2}{\frac{\sigma_2^2}{\|\boldsymbol{v}_1\|^2} + 1} < \|\boldsymbol{v}_2\|^2.$$

Thus, we have $L_{side}(0) > R_{side}$.

Due to $L_{side}(1) < R_{side} < L_{side}(0)$, there exists at least one $\eta_0 \in (0,1)$ satisfying $L_{side}(\eta_0) = R_{side}$. In this case, $\boldsymbol{H}_{12}$ has an inverse/Moore-Penrose pseudo-inverse matrix $\boldsymbol{H}_{12}^\dagger$. Then, we have

$$\begin{aligned} \boldsymbol{\delta}_p &= \|\boldsymbol{v}_\delta\| \cdot \boldsymbol{H}_{12}^\dagger \big(\sqrt{\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2}^\perp \boldsymbol{v}_1} + \sqrt{1-\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2} \boldsymbol{v}_1}\big), \\ &= \|\boldsymbol{\delta}_p\| \cdot e^{j\phi_\delta} \cdot \overrightarrow{\boldsymbol{\delta}_p}, \end{aligned} \tag{32}$$

where $\|\boldsymbol{v}_\delta\| = \frac{\|\boldsymbol{\delta}_p\|}{\left\|\boldsymbol{H}_{12}^\dagger \big(\sqrt{\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2}^\perp \boldsymbol{v}_1} + \sqrt{1-\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2} \boldsymbol{v}_1}\big)\right\|}$ depends on but has no requirement for $\|\boldsymbol{\delta}_p\|$. Therefore, $\boldsymbol{v}_\delta$ with any $\|\boldsymbol{\delta}_p\|$ and $\overrightarrow{\boldsymbol{\delta}_p} = e^{-j\phi_\delta} \cdot \overrightarrow{\boldsymbol{H}_{12}^\dagger \big(\sqrt{\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2}^\perp \boldsymbol{v}_1} + \sqrt{1-\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2} \boldsymbol{v}_1}\big)}$ satisfies (27).

Therefore, any $\boldsymbol{\delta}_p = \|\boldsymbol{\delta}_p\| \cdot e^{j\phi_\delta} \cdot \overrightarrow{\boldsymbol{\delta}_p}$ with

$$\overrightarrow{\boldsymbol{\delta}_p} = \begin{cases} \displaystyle\sum_{i=1}^{\mathrm{Rank}(\Pi_{\boldsymbol{H}_{12}^T}^\perp)} a_i \boldsymbol{u}_i(\Pi_{\boldsymbol{H}_{12}^T}^\perp), \quad \sum_{i=1}^{\mathrm{Rank}(\Pi_{\boldsymbol{H}_{12}^T}^\perp)} |a_i|^2 = 1, & \text{when } N_R < N_T \text{ or } \mathrm{Rank}(\boldsymbol{H}_{12}) < N_T \leq N_R \\ e^{-j\phi_\delta} \cdot \overrightarrow{\boldsymbol{H}_{12}^\dagger \big(\sqrt{\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2}^\perp \boldsymbol{v}_1} + \sqrt{1-\eta_0} \cdot \overrightarrow{\Pi_{\boldsymbol{v}_2} \boldsymbol{v}_1}\big)}, & \text{when } \mathrm{Rank}(\boldsymbol{H}_{12}) = N_T \leq N_R, \end{cases} \tag{33}$$

satisfies the condition (23b).

2. Existence of ϕ_δ

Substituting (24) into (23a) yields

$$\begin{aligned} & (\boldsymbol{w}_1 + \boldsymbol{\delta}_p)^H \boldsymbol{A}_1(\boldsymbol{w}_2)(\boldsymbol{w}_1 + \boldsymbol{\delta}_p) > \boldsymbol{w}_1^H \boldsymbol{A}_1(\boldsymbol{w}_2) \boldsymbol{w}_1 \\ \Longleftrightarrow\ & \|\boldsymbol{\delta}_p\|^2 \overrightarrow{\boldsymbol{\delta}_p}^H \boldsymbol{A}_1(\boldsymbol{w}_2) \overrightarrow{\boldsymbol{\delta}_p} + 2\|\boldsymbol{\delta}_p\| \Re\Big(\boldsymbol{w}_1^H \boldsymbol{A}_1(\boldsymbol{w}_2) \overrightarrow{\boldsymbol{\delta}_p} \cdot e^{j\phi_\delta}\Big) > 0 \\ \Longleftrightarrow\ & \frac{\|\boldsymbol{\delta}_p\|}{2} \overrightarrow{\boldsymbol{\delta}_p}^H \boldsymbol{A}_1(\boldsymbol{w}_2) \overrightarrow{\boldsymbol{\delta}_p} + \big|\boldsymbol{w}_1^H \boldsymbol{A}_1(\boldsymbol{w}_2) \overrightarrow{\boldsymbol{\delta}_p}\big| \cdot \cos(\phi_\delta + \phi_2) > 0 \\ \Longleftrightarrow\ & \cos(\phi_\delta + \phi_2) > -\frac{\|\boldsymbol{\delta}_p\|}{2} \cdot \frac{\overrightarrow{\boldsymbol{\delta}_p}^H \boldsymbol{A}_1(\boldsymbol{w}_2) \overrightarrow{\boldsymbol{\delta}_p}}{\big|\boldsymbol{w}_1^H \boldsymbol{A}_1(\boldsymbol{w}_2) \overrightarrow{\boldsymbol{\delta}_p}\big|}, \end{aligned} \tag{34}$$

where $\phi_2 \triangleq \arg(\boldsymbol{w}_1^H \boldsymbol{A}_1(\boldsymbol{w}_2)\overrightarrow{\boldsymbol{\delta}_p})$.

At the same time, substituting (24) into (23c) yields

$$\begin{aligned} & \|\boldsymbol{w}_1 + \boldsymbol{\delta}_p\|^2 > \|\boldsymbol{w}_1\|^2 \\ \iff & \|\boldsymbol{\delta}_p\|^2 + 2\|\boldsymbol{\delta}_p\| \Re\Big(\boldsymbol{w}_1^H \overrightarrow{\boldsymbol{\delta}_p} \cdot e^{j\phi_\delta}\Big) > 0 \\ \iff & \big|\boldsymbol{w}_1^H \overrightarrow{\boldsymbol{\delta}_p}\big| \cos(\phi_\delta + \phi_3) > -\frac{\|\boldsymbol{\delta}_p\|}{2} \\ \iff & \cos(\phi_\delta + \phi_3) > -\frac{\|\boldsymbol{\delta}_p\|}{2|\boldsymbol{w}_1^H \overrightarrow{\boldsymbol{\delta}_p}|}, \end{aligned} \tag{35}$$

where $\phi_3 \triangleq \arg(\boldsymbol{w}_1^H \overrightarrow{\boldsymbol{\delta}_p})$.

Define $\phi_\delta + \phi_2 \in [\theta_1, \theta_2]$ and $\phi_\delta + \phi_3 \in [\theta_3, \theta_4]$. Since both the right-hand side of (34) and (35) are negative, the range $[\theta_1, \theta_2]$ and $[\theta_3, \theta_4]$ are strictly wider than π. In addition, the intersection of two angular ranges wider than π is nonempty. Then, any $\boldsymbol{\delta}_p$ in (24) with $\phi_\delta \in [\theta_1, \theta_2] \cap [\theta_3, \theta_4]$ satisfies the conditions (34) and (35) simultaneously.

3. Existence of $\|\boldsymbol{\delta}_p\|$

The condition (23d) is equivalent to $\|\boldsymbol{w}_1 + \boldsymbol{\delta}_p\| \leq 1$. In addition, due to $\|\boldsymbol{w}_1 + \boldsymbol{\delta}_p\| \leq \|\boldsymbol{w}_1\| + \|\boldsymbol{\delta}_p\|$, any $\boldsymbol{\delta}_p$ in (24) with

$$\|\boldsymbol{\delta}_p\| \leq 1 - \|\boldsymbol{w}_1\| \tag{36}$$

satisfies the condition (23d).

Above all, the existence of $\overrightarrow{\boldsymbol{\delta}_p}$, ϕ_δ and $\|\boldsymbol{\delta}_p\|$ has been proved. That is, there always exists some $\boldsymbol{\delta}_p = \|\boldsymbol{\delta}_p\| \cdot e^{j\phi_\delta} \cdot \overrightarrow{\boldsymbol{\delta}_p}$ satisfying all the conditions in (23). Then, $R_1(\boldsymbol{w}_1, \boldsymbol{w}_2)$ can still be improved untill $\|\boldsymbol{w}_1\|^2 = 1$, while $R_1(\boldsymbol{w}_1, \boldsymbol{w}_2)$ remains unchanged simultaneously. This contradicts the assumption that $\big(R_1(\boldsymbol{w}_1, \boldsymbol{w}_2), R_2(\boldsymbol{w}_1, \boldsymbol{w}_2)\big)$ is on the strict Pareto boundary. Therefore, Proposition 2 holds. ■

C. Proof of Proposition 3

Proof: For the turning point $T1(\overline{R_1}, \underline{R_2})$, to achieve the maximum rate of link $\mathrm{TX}_1 \mapsto \mathrm{RX}_1$, i.e., $\overline{R_1}$ in (4a), $(\boldsymbol{w}_1, \boldsymbol{w}_2)$ should satisfy the following conditions

$$\boldsymbol{w}_1 = \boldsymbol{w}_1^{Ego} = \boldsymbol{u}_1(\boldsymbol{H}_{11}^H \boldsymbol{H}_{11}), \tag{37a}$$

$$\theta_{H,1} = \pi/2 \Leftrightarrow \boldsymbol{w}_2 \perp \boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1. \tag{37b}$$

This means $\boldsymbol{w}_2$ should be in the null space of $\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}$ to create no interference to RX_1. All $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}}$ satisfying (37) form a set of the ZF strategies, defined as $\mathcal{W}_{\mathcal{ZF}}$. Then, any $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{ZF}}$ can be expressed as

$$\boldsymbol{w}_2 = \overrightarrow{\Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{v}_2}, \tag{38}$$

where $\boldsymbol{v}_2 \in \mathbb{C}^{N_T \times 1}$ and $\boldsymbol{v}_2 \nparallel \boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}$.

To achieve $(\overline{R_1}, \underline{R_2})$, we need to find $\boldsymbol{v}_2^{opt}$ which maximizes $\mathrm{SINR}_2(\boldsymbol{w}_1^{Ego}, \boldsymbol{w}_2)$ simultaneously. Here, we define the optimal ”altruistic” strategy $\boldsymbol{w}_2^{Alt}$ as

$$\begin{aligned}
\boldsymbol{w}_2^{Alt} &\triangleq \arg \max_{\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{ZF}}} \boldsymbol{w}_2^H \boldsymbol{A}_2(\boldsymbol{w}_1^{Ego}) \boldsymbol{w}_2 \\
\overset{by (38)}{\Longleftrightarrow} \boldsymbol{v}_2^{opt} &= \arg \max_{\boldsymbol{v}_2 \in \mathbb{C}^{N_T \times 1}} \frac{\boldsymbol{v}_2^H \Pi^{\perp,H}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{A}_2(\boldsymbol{w}_1^{Ego}) \Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{v}_2}{\boldsymbol{v}_2^H \Pi^{\perp,H}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{v}_2} \\
&= \arg \max_{\boldsymbol{v}_2 \in \mathbb{C}^{N_T \times 1}} \frac{\boldsymbol{v}_2^H \overbrace{\Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{A}_2(\boldsymbol{w}_1^{Ego}) \Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}}}^{\triangleq \boldsymbol{B}_1} \boldsymbol{v}_2}{\boldsymbol{v}_2^H \Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{v}_2} \\
&= \boldsymbol{u}_1\big(\boldsymbol{B}_1, \Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}}\big).
\end{aligned} \tag{39}$$

Substituting (39) into (38), we obtain the optimal ”altruistic” strategy

$$\boldsymbol{w}_2^{Alt} = \overrightarrow{\Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}} \boldsymbol{u}_1(\boldsymbol{B}_1, \Pi^{\perp}_{\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{w}_1^{Ego}})}.$$

Therefore, $T1(\overline{R}_1, \underline{R}_2)$ can be computed as $\Big(\log_2 \Big(1 + \frac{\lambda_1(\boldsymbol{H}_{11}^H \boldsymbol{H}_{11})}{\sigma_1^2}\Big), \log_2 \Big(1 + \boldsymbol{w}_2^{Alt,H} \boldsymbol{A}_2(\boldsymbol{w}_1^{Ego}) \boldsymbol{w}_2^{Alt}\Big)\Big)$ by $(\boldsymbol{w}_1^{Ego}, \boldsymbol{w}_1^{Alt})$. ■

D. Solving the SDR problem (P2)

Before we solve the problem (P2), we need first to consider its solvability.

Lemma 1 *The problem* (P2) *is solvable, i.e., its respective finite optimal solutions exist.* □

Proof: The given $\boldsymbol{w}_2$ is assumed feasible for (P0). It means that there exists at least one solution $\boldsymbol{w}_1 \in \mathcal{W}_{\mathcal{FP}}$ to (P1) by fixing $\boldsymbol{w}_2$. Thus, $\boldsymbol{W}_1 = \boldsymbol{w}_1 \boldsymbol{w}_1^H$ should be a solution to (P2) and its objective function is still bounded by $(0, 2^{\overline{R}_1} - 1)$. Based on Weierstrass' Theorem, the problem (P2) is solvable, i.e., its respective finite optimal solutions exist. ■

We can obtain the optimal solution $\boldsymbol{W}_1^{\star}$ to the problem (P2) by a convex optimization toolbox.

However, the rank of an optimal solution to $(\mathrm{P2})$ is usually more than one because we have discarded the rank constraint $\mathrm{Rank}(\boldsymbol{W}_1) = 1$. If $\boldsymbol{W}_1^\star$ is rank-one, then we can easily get the optimal rank-one solution to $(\mathrm{P2})$ by eigen-decomposition, i.e., $\boldsymbol{w}_1 = \boldsymbol{u}_1(\boldsymbol{W}_1^\star)$. If the rank of $\boldsymbol{W}_1^\star$ is greater than one, we can perform a matrix rank-one decomposition $\boldsymbol{W}_1^\star = \sum_{r=1}^{\mathrm{Rank}(\boldsymbol{W}_1^\star)} \boldsymbol{x}_r^\star \boldsymbol{x}_r^{\star H}$ such that

$$\boldsymbol{x}_r^{\star H}\boldsymbol{C}(\boldsymbol{w}_2^{(l-1)})\boldsymbol{x}_r^\star = \frac{\mathrm{Tr}\big(\boldsymbol{C}(\boldsymbol{w}_2^{(l-1)})\boldsymbol{W}_1^\star\big)}{\mathrm{Rank}(\boldsymbol{W}_1^\star)} \quad \text{and} \quad \boldsymbol{x}_r^{\star H}\boldsymbol{x}_r^\star = \frac{\mathrm{Tr}(\boldsymbol{W}_1^\star)}{\mathrm{Rank}(\boldsymbol{W}_1^\star)}, \quad \forall r = 1, ..., \mathrm{Rank}(\boldsymbol{W}_1^\star).$$

Since $(\mathrm{P2})$ has two constraints, there is no gap between the optimal value of the SDR problem $(\mathrm{P2})$ of $\boldsymbol{x}_r^\star$ and that of the QCQP problem $(\mathrm{P1})$ of $\boldsymbol{w}_1$ [25]. The theorem and algorithm of the matrix rank-one decomposition are based on the results in [18],[19]. Here, we quote Theorem 2.2 in [19] in the following lemma.

Lemma 2 *Let* $\boldsymbol{A}_i,\ i = 1,2,3$ *be* $N \times N$ *Hermitian matrices, and* $\boldsymbol{X}$ *be a nonzero* $N \times N$ *Hermitian positive semidefinite matrix where* $N \geq 3$*. Then,*

If $\mathrm{Rank}(\boldsymbol{X}) \geq 3$*, one can find in polynomial-time a nonzero vector* $\boldsymbol{y} \in \mathrm{Range}(\boldsymbol{X})$ *such that*

$$\mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{y}\boldsymbol{y}^H) = \mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{X}), \qquad i = 1,2,3.$$

with $\boldsymbol{X} - \frac{1}{\mathrm{Rank}(\boldsymbol{X})}\boldsymbol{y}\boldsymbol{y}^H \succeq \boldsymbol{0}$ *and* $\mathrm{Rank}(\boldsymbol{X} - \frac{1}{\mathrm{Rank}(\boldsymbol{X})}\boldsymbol{y}\boldsymbol{y}^H) \leq \mathrm{Rank}(\boldsymbol{X}) - 1$.

If $\mathrm{Rank}(\boldsymbol{X}) = 2$*, then for any* $\boldsymbol{z} \notin \mathrm{Range}(\boldsymbol{X})$ *there exits one* $\boldsymbol{y} \in \mathbb{C}^N$ *in the linear subspace spanned by* $\boldsymbol{z} \cup \mathrm{Range}(\boldsymbol{X})$*, such that*

$$\mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{y}\boldsymbol{y}^H) = \mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{X}), \qquad i = 1,2,3.$$

with $\boldsymbol{X} + \boldsymbol{z}\boldsymbol{z}^H - \frac{1}{\mathrm{Rank}(\boldsymbol{X})}\boldsymbol{y}\boldsymbol{y}^H \succeq \boldsymbol{0}$ *and* $\mathrm{Rank}(\boldsymbol{X} + \boldsymbol{z}\boldsymbol{z}^H - \frac{1}{\mathrm{Rank}(\boldsymbol{X})}\boldsymbol{y}\boldsymbol{y}^H) \leq 2$. □

The only condition for the applicability of Lemma 2 to $\boldsymbol{W}_1^\star$ is $N_T \geq 3$. It means TX_1 should has $N_T \geq 3$ antennas. Then, we can obtain an optimal rank-one solution $\boldsymbol{w}_1$ to $(\mathrm{P1})$ via solving $(\mathrm{P2})$.

E. Solving the SDR problem $(\mathrm{P4})$

We show the SDR problem $(\mathrm{P4})$ and the fractional SDR problem $(\mathrm{P5})$ are solvable and equivalent.

Lemma 3 *Both the fractional SDR problem* $(\mathrm{P4})$ *and the SDR problem* $(\mathrm{P5})$ *are solvable.* □

Proof: For the fractional SDR problem $(\mathrm{P4})$, its feasible region

$$\Omega = \{\boldsymbol{W}_2 \succeq \boldsymbol{0} : \mathrm{Tr}\big(\boldsymbol{W}_2\big) = 1,\ \mathrm{Tr}\big(\boldsymbol{A}_2(\boldsymbol{w}_1)\boldsymbol{W}_2\big) = \mathrm{SINR}_2^\star\}$$

is a nonempty and compact set because both $(\mathrm{P4})$ and $(\mathrm{P2})$ are transformed from $(\mathrm{P0})$. If $\tilde{\boldsymbol{W}}_1$ is a solution to $(\mathrm{P2})$ for a given $\tilde{\boldsymbol{W}}_2$, $\tilde{\boldsymbol{W}}_2$ should be a solution (regardless whether it is optimal) to $(\mathrm{P4})$ for a given $\tilde{\boldsymbol{W}}_1$.

Observe that both the denominator and numerator of the objective function of $(\mathrm{P4})$ are continuous over the region Ω. The denominator is positive and satisfies

$$\sigma_1^2 + \lambda_{N_T}(\boldsymbol{H}_{21}^H \boldsymbol{H}_{21}) = \lambda_{N_T}(\boldsymbol{C}_2) \le \mathrm{Tr}\big(\boldsymbol{C}_2 \boldsymbol{W}_2\big) \le \lambda_1(\boldsymbol{C}_2) = \sigma_1^2 + \lambda_1(\boldsymbol{H}_{21}^H \boldsymbol{H}_{21}), \tag{40}$$

and the numerator is obviously nonnegative and satisfies

$$0 \le \mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{W}_2\big) \le \lambda_1(\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{H}_{11}^H \boldsymbol{H}_{21}). \tag{41}$$

This implies that the objective function of the fractional SDR problem $(\mathrm{P4})$ is bounded over the region Ω by

$$0 \le \frac{\mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{W}_2\big)}{\mathrm{Tr}\big(\boldsymbol{C}_2 \boldsymbol{W}_2\big)} \le \frac{\lambda_1(\boldsymbol{H}_{21}^H \boldsymbol{H}_{11} \boldsymbol{H}_{11}^H \boldsymbol{H}_{21})}{\sigma_1^2 + \lambda_{N_T}(\boldsymbol{H}_{21}^H \boldsymbol{H}_{21})}.$$

Based on Weierstrass' Theorem, the problem $(\mathrm{P4})$ always has an optimal solution.

Assume that $\boldsymbol{W}_2^\star$ is an optimal solution to $(\mathrm{P4})$, we know that $s^\star = \frac{1}{\mathrm{Tr}\left(\boldsymbol{C}_2 \boldsymbol{W}_2^\star\right)}$ and $\boldsymbol{Q}^\star = s^\star \cdot \boldsymbol{W}_2^\star$ are feasible for $(\mathrm{P5})$. Also note that its objective function is also bounded by (41). Similarly, $(\mathrm{P5})$ is solvable according to Weierstrass' Theorem. ■

Lemma 4 *The problems* $(\mathrm{P4})$ *and* $(\mathrm{P5})$ *have the same value. Furthermore, if* $\boldsymbol{W}_2^\star$ *solves* $(\mathrm{P4})$*, then* $s^\star = \frac{1}{\mathrm{Tr}\left(\boldsymbol{C}_2 \boldsymbol{W}_2^\star\right)}$ *and* $\boldsymbol{Q}^\star = s^\star \cdot \boldsymbol{W}_2^\star$ *solves* $(\mathrm{P5})$*; if* $\boldsymbol{Q}^\star$ *and* $s^\star$ *solve* $(\mathrm{P5})$*, then* $\boldsymbol{W}_2^\star = \frac{\boldsymbol{Q}^\star}{s^\star}$ *solves* $(\mathrm{P4})$.□

Proof: Assume that $\boldsymbol{W}_2^\star$ is an optimal solution to $(\mathrm{P4})$, and $v_{(\mathrm{P4})}^\star$ and $v_{(\mathrm{P5})}^\star$ are the optimal values of the objective function of $(\mathrm{P4})$ and $(\mathrm{P5})$, respectively. Thus, $s = \frac{1}{\mathrm{Tr}\left(\boldsymbol{C}_2 \boldsymbol{W}_2^\star\right)}$ and $\boldsymbol{Q} = s \cdot \boldsymbol{W}_2^\star$ are feasible for $(\mathrm{P5})$. The value of the objective function of $(\mathrm{P5})$ at this feasible point is

$$\begin{aligned} v_{(\mathrm{P5})} &= \mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{Q}\big) \\ &= \mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)(s \cdot \boldsymbol{W}_2^\star)\big) = \frac{\mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{W}_2^\star\big)}{\mathrm{Tr}\big(\boldsymbol{C}_2 \boldsymbol{W}_2^\star\big)} = v_{(\mathrm{P4})}^\star \\ &\ge v_{(\mathrm{P5})}^\star. \end{aligned}$$

On the other hand, suppose that $\boldsymbol{Q}^\star$ and $s^\star$ are the optimal solutions to $(\mathrm{P5})$. Since $s^\star$ is always positive according to (40), $\boldsymbol{W}_2 = \frac{\boldsymbol{Q}^\star}{s^\star}$ is also feasible for $(\mathrm{P4})$. Then, the value of the objective function of $(\mathrm{P4})$ at this feasible point is

$$
\begin{aligned}
v_{(\mathrm{P4})} &= \frac{\mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{W}_2\big)}{\mathrm{Tr}\big(\boldsymbol{C}_2\boldsymbol{W}_2\big)} \\
&= \frac{\mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\frac{\boldsymbol{Q}^\star}{s^\star}\big)}{\mathrm{Tr}\big(\boldsymbol{C}_2\frac{\boldsymbol{Q}^\star}{s^\star}\big)} = \frac{\mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{Q}^\star\big)}{\mathrm{Tr}\big(\boldsymbol{C}_2\boldsymbol{Q}^\star\big)} = \mathrm{Tr}\big(\boldsymbol{C}_1(\boldsymbol{w}_1)\boldsymbol{Q}^\star\big) = v^\star_{(\mathrm{P5})} \\
&\geq v^\star_{(\mathrm{P4})}.
\end{aligned}
$$

Above all, we have $v^\star_{(\mathrm{P4})} = v^\star_{(\mathrm{P5})}$. ■

Therefore, we can solve the fractional SDR problem $(\mathrm{P4})$ via the solution to the SDR problem $(\mathrm{P5})$. After obtaining the optimal solution $(\boldsymbol{Q}^\star, s^\star)$ to $(\mathrm{P5})$, we get the optimal solution to $(\mathrm{P4})$ by $\boldsymbol{W}_2^\star = \frac{\boldsymbol{Q}^\star}{s^\star}$ based on Lemma 4. If $\boldsymbol{W}_2^\star$ is of rank one, we get $\boldsymbol{w}_2$ by eigen-decomposition. Otherwise, we can construct a optimal rank-one solution $\boldsymbol{w}_2\boldsymbol{w}_2^H = \boldsymbol{W}_2^\star$ by a matrix rank-one decomposition in [19], which also certifies $(\mathrm{P5})$ is tight. Here, we quote the following lemma from the Theorem 2.3 in [19].

Lemma 5 *Let $\boldsymbol{A}_i,\ i = 1, 2, 3, 4$ be $N \times N$ Hermitian matrices, and $\boldsymbol{X}$ be a nonzero $N \times N$ Hermitian positive semidefinite matrix where $N \geq 3$. Furthermore, suppose that*

$$
\Big(\mathrm{Tr}(\boldsymbol{A}_1\boldsymbol{Y}), \mathrm{Tr}(\boldsymbol{A}_2\boldsymbol{Y}), \mathrm{Tr}(\boldsymbol{A}_3\boldsymbol{Y}), \mathrm{Tr}(\boldsymbol{A}_4\boldsymbol{Y})\Big) \neq (0, 0, 0, 0) \tag{42}
$$

for any nonzero $N \times N$ Hermitian positive semidefinite matrix $\boldsymbol{Y}$. Then,

If $\mathrm{Rank}(\boldsymbol{X}) \geq 3$, one can find in polynomial-time a nonzero vector $\boldsymbol{y} \in \mathrm{Range}(\boldsymbol{X})$ such that

$$
\mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{y}\boldsymbol{y}^H) = \mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{X}), \qquad i = 1, 2, 3, 4.
$$

If $\mathrm{Rank}(\boldsymbol{X}) = 2$, then for any $\boldsymbol{z} \notin \mathrm{Range}(\boldsymbol{X})$ there exists one $\boldsymbol{y} \in \mathbb{C}^N$ in the linear subspace spanned by $\boldsymbol{z} \cup \mathrm{Range}(\boldsymbol{X})$, such that

$$
\mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{y}\boldsymbol{y}^H) = \mathrm{Tr}(\boldsymbol{A}_i\boldsymbol{X}), \qquad i = 1, 2, 3, 4.
$$

□

It remains to show whether the Lemma 5 is applicable to the solution $\boldsymbol{W}_2^\star$ to $(\mathrm{P5})$. One condition $N_T \geq 3$ means that TX_2 should be equipped with $N_T \geq 3$ antennas. The other condition in (42) suffices to prove that there is $(a_1, a_2, a_3, a_4) \in \mathbb{R}^4$ such that $a_1\boldsymbol{C}_1(\boldsymbol{w}_1^{(l-1)}) + a_2\boldsymbol{A}_2(\boldsymbol{w}_1^{(l-1)}) + a_3\boldsymbol{C}_2 + a_4\boldsymbol{I} \succ \boldsymbol{0}$ [22], which can be satisfied by $(a_1, a_2, a_3, a_4) = (0, 0, 0, |a_4|)$ with $a_4 \neq 0$.

F. Proof of Proposition 4

Proof: We need to find a feasible set $\mathcal{W}_{\mathcal{F}}$ such that there exists some solution $\boldsymbol{w}_1 \in \mathcal{W}_{\mathcal{FP}}$ to problem $(\mathrm{P0})$ by fixing $\boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{F}}$.

In (8b), the constraint of $(\mathrm{P0})$ is equivalent to $\boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22} \boldsymbol{w}_2 \geq \sigma_2^2 \mathrm{SINR}_2^\star$ and

$$\boldsymbol{w}_1^H \boldsymbol{C}(\boldsymbol{w}_2) \boldsymbol{w}_1 = 0. \tag{43}$$

To guarantee the existence of $\boldsymbol{w}_1 \in \mathcal{W}_{\mathcal{FP}}$, a feasible $\boldsymbol{w}_2$ should be determined in a way such that (8b) is satisfied.

Define $\boldsymbol{C}(\boldsymbol{w}_2) \overset{eig}{=} \sum_{i=1}^{N_T} \lambda_i(\boldsymbol{C}(\boldsymbol{w}_2)) \boldsymbol{u}_i(\boldsymbol{C}(\boldsymbol{w}_2)) \boldsymbol{u}_i^H(\boldsymbol{C}(\boldsymbol{w}_2))$. We analyze $\boldsymbol{C}(\boldsymbol{w}_2)$ for two cases.

Case 1. When $\boldsymbol{C}(\boldsymbol{w}_2)$ is a full rank matrix, i.e., $\lambda_i(\boldsymbol{C}(\boldsymbol{w}_2)) \neq 0, \forall i = 1, ..., N_T$, $\boldsymbol{C}(\boldsymbol{w}_2)$ has three possibilities: a positive definite matrix ($\boldsymbol{C}(\boldsymbol{w}_2) \succ \mathbf{0}$), a negative definite matrix ($\boldsymbol{C}(\boldsymbol{w}_2) \prec \mathbf{0}$), and $\lambda_1(\boldsymbol{C}(\boldsymbol{w}_2)) > 0$ and $\lambda_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2)) < 0$.

If $\boldsymbol{C}(\boldsymbol{w}_2)$ is a positive/negative definite matrix, it is clear that there is not a nonzero vector $\boldsymbol{w}_2$ satisfying (43). For $\boldsymbol{C}(\boldsymbol{w}_2)$ with $\lambda_1(\boldsymbol{C}(\boldsymbol{w}_2)) > 0$ and $\lambda_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2)) < 0$, a sufficient solution to (43) is

$$\boldsymbol{w}_1 = \sqrt{\frac{\lambda_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2))}{\lambda_1(\boldsymbol{C}(\boldsymbol{w}_2)) - \lambda_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2))}} j \cdot \boldsymbol{u}_1(\boldsymbol{C}(\boldsymbol{w}_2)) + \sqrt{\frac{\lambda_1(\boldsymbol{C}(\boldsymbol{w}_2))}{\lambda_1(\boldsymbol{C}(\boldsymbol{w}_2)) - \lambda_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2))}} \cdot \boldsymbol{u}_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2)).$$

Case 2. When $\boldsymbol{C}(\boldsymbol{w}_2)$ is not a full rank matrix, i.e., $\lambda_i(\boldsymbol{C}(\boldsymbol{w}_2)) = 0$ for some $i \in \{1, ..., N_T\}$, $\boldsymbol{C}(\boldsymbol{w}_2)$ has three probabilities: $\lambda_1(\boldsymbol{C}(\boldsymbol{w}_2)) = 0$, $\lambda_{N_T}(\boldsymbol{C}(\boldsymbol{w}_2)) = 0$, and $\lambda_i(\boldsymbol{C}(\boldsymbol{w}_2)) = 0$ for some $i \neq \{1, N_T\}$. In this case, $\boldsymbol{C}(\boldsymbol{w}_2)$ always has null space for $\boldsymbol{w}_2$ to satisfy (43).

Above all, the sufficient and necessary condition of $\boldsymbol{w}_2$ satisfying (43) is $\lambda_1\big(\boldsymbol{C}(\boldsymbol{w}_2)\big) \cdot \lambda_{N_T}\big(\boldsymbol{C}(\boldsymbol{w}_2)\big) \leq 0$. Therefore, any feasible $\boldsymbol{w}_2$ for (8b) should be in the following set

$$\mathcal{W}_{\mathcal{F}} \triangleq \Big\{ \boldsymbol{w}_2 \in \mathcal{W}_{\mathcal{FP}} : \boldsymbol{w}_2^H \boldsymbol{H}_{22}^H \boldsymbol{H}_{22} \boldsymbol{w}_2 \geq \sigma_2^2 \mathrm{SINR}_2^\star,\ \lambda_1\big(\boldsymbol{C}(\boldsymbol{w}_2)\big) \cdot \lambda_{N_T}\big(\boldsymbol{C}(\boldsymbol{w}_2)\big) \leq 0 \Big\}.$$

■

REFERENCES

[1] E. G. Larsson and E. A. Jorswieck, "Competition versus cooperation on the MISO interference channel," *IEEE J. Sel. Areas Commun.*, vol. 26, no. 7, pp. 1059–1069, Sep. 2008.

[2] E. Jorswieck, E. Larsson, and D. Danev, "Complete characterization of the Pareto boundary for the MISO interference channel," *IEEE Trans. Signal Process.*, vol. 56, no. 10, pp. 5292–5296, Oct. 2008.

[3] J. Lindblom, E. Karipidis, and E. Larsson, "Closed-form parameterization of the Pareto boundary for the two-user MISO interference channel," in *Proc. IEEE ICASSP*, Prague, Czech Republic, May 2011.

[4] R. Mochaourab and E. Jorswieck, “Optimal beamforming in interference networks with perfect local channel information,” *IEEE Trans. Signal Process.*, vol. 59, no. 3, pp. 1128 – 1141, Mar. 2011.

[5] E. Karipidis and E. Larsson, “Efficient computation of the Pareto boundary for the MISO interference channel with perfect CSI,” in *Proc. WiOpt 2010*, Avignon, France, June 2010.

[6] R. Zhang and S. Cui, “Cooperative interference management with MISO beamforming,” *IEEE Trans. Signal Process.*, vol. 58, no. 10, pp. 54505458, Oct. 2010.

[7] J. Qiu, R. Zhang, Z.-Q. Luo, and S. Cui, “Optimal distributed beamforming for MISO interference channels,” *IEEE Trans. Signal Process.*, vol. 59, no. 11, pp. 5638–5643, Nov. 2011.

[8] Z.-Q. Luo and S. Zhang, “Dynamic spectrum management: complexity and duality,” *IEEE J. Sel. Topics Signal Process.*, vol. 2, no. 1, pp. 57–73, Feb. 2008.

[9] Q. Shi, M. Razaviyayn, Z.-Q. Luo, and C. He, “An iteratively weighted MMSE approach to distributed sum-utility maximization for a MIMO interfering broadcast channel,” *IEEE Trans. Signal Process.*, vol. 59, no. 9, pp. 4331–4340, Sep. 2011.

[10] D. A. Schmidt, C. Shi, R. A. Berry, M. L. Honig, and W. Utschick, “Distributed resource allocation schemes,” *IEEE Signal Processing Mag.*, vol. 26, no. 5, pp. 53–63, Sep. 2009.

[11] C. Shi, D. A. Schmidt, R. A. Berry, M. L. Honig, and W. Utschick, “Distributed interference pricing for the MIMO interference channel,” in *Proc. IEEE ICC*, Dresden, Germany, 2009.

[12] Z. K. M. Ho and D. Gesbert, “Balancing egoism and altruism on the interference channel: The MIMO case,” in *Proc. IEEE ICC*, Cape Town, South Africa, 2010.

[13] S. W. Peters and Jr. R. W. Heath, “Cooperative algorithms for MIMO interference channels,” *IEEE Trans. Veh. Technol.*, vol. 60, no. 1, pp. 206–218, Jan. 2011.

[14] V. R. Cadambe and S. A. Jafar, “Interference alignment and degrees of freedom of the k-user interference channel,” *IEEE Trans. Inf. Theory*, vol. 54, no. 8, pp. 3425–3441, Aug. 2008.

[15] C.-B. Chae, I. Hwang, Jr. R. W. Heath, and V. Tarokh, “Interference aware-coordinated beamforming system in a two-cell environment,” *IEEE J. Sel. Areas Commun.*, 2009, submitted, available at `http://dash.harvard.edu/bitstream/handle/1/3293263/Chae_Interference.pdf?sequence=2`.

[16] E. Bjornson, M. Bengtsson, and B. Ottersten, “Pareto characterization of the multicell MIMO performance region with simple receivers,” *IEEE Trans. Signal Process.*, 2011, submitted, available at `http://arxiv.org/abs/1105.4880`.

[17] Z.-Q. Luo, W.-K. Ma, M.-C. So, Y. Ye, and S. Zhang, “Semidefinite relaxation of quadratic optimization problems,” *IEEE Signal Processing Mag.*, vol. 27, no. 3, pp. 20–34, May 2010.

[18] Y. Huang, A. De Maio, and S. Zhang, “Semidefinite programming, matrix decomposition, and radar code design,” in *Convex Optimization in Signal Processing and Communications*, Cambridge University Press, New York, 2010, pp. 192–228.

[19] W. Ai, Y. Huang, and S. Zhang, “New results on Hermitian matrix rank-one decomposition,” *Math. Program: Ser. A*, vol. 128, no. 1-2, pp. 253–283, June 2011.

[20] I. Polik, “Addendum to the SeDuMi user guide: Version 1.1,” 2005, SeDuMi software available at `http://sedumi.ie.lehigh.edu.`

[21] A. Charnes and W. W. Cooper, “Programming with linear fractional functions,” *Naval Res. Logist. Quarter.*, vol. 9, pp. 181–186, 1962.

[22] A. De Maio, Y. Huang, D. P. Palomar, S. Zhang, and A. Farina, “Fractional QCQP with applications in ML steering direction estimation for radar detection,” *IEEE Trans. Signal Process.*, vol. 59, no. 1, pp. 172–185, Jan. 2011.

[23] C. D. Meyer, *Matrix analysis and applied linear algebra*, Cambridge University Press, New York, NY, USA, 2000.

[24] K. Scharnhorst, “Angles in complex vector spaces,” *Acta Appl. Math.*, vol. 69, no. 1, pp. 95–103, Oct. 2001.

[25] Y. J. Zhang and A. Man-Cho So, “Optimal spectrum sharing in MIMO cognitive radio networks via semidefinite programming,” *IEEE J. Sel. Areas Commun.*, vol. 29, no. 2, pp. 362–373, Feb. 2011.

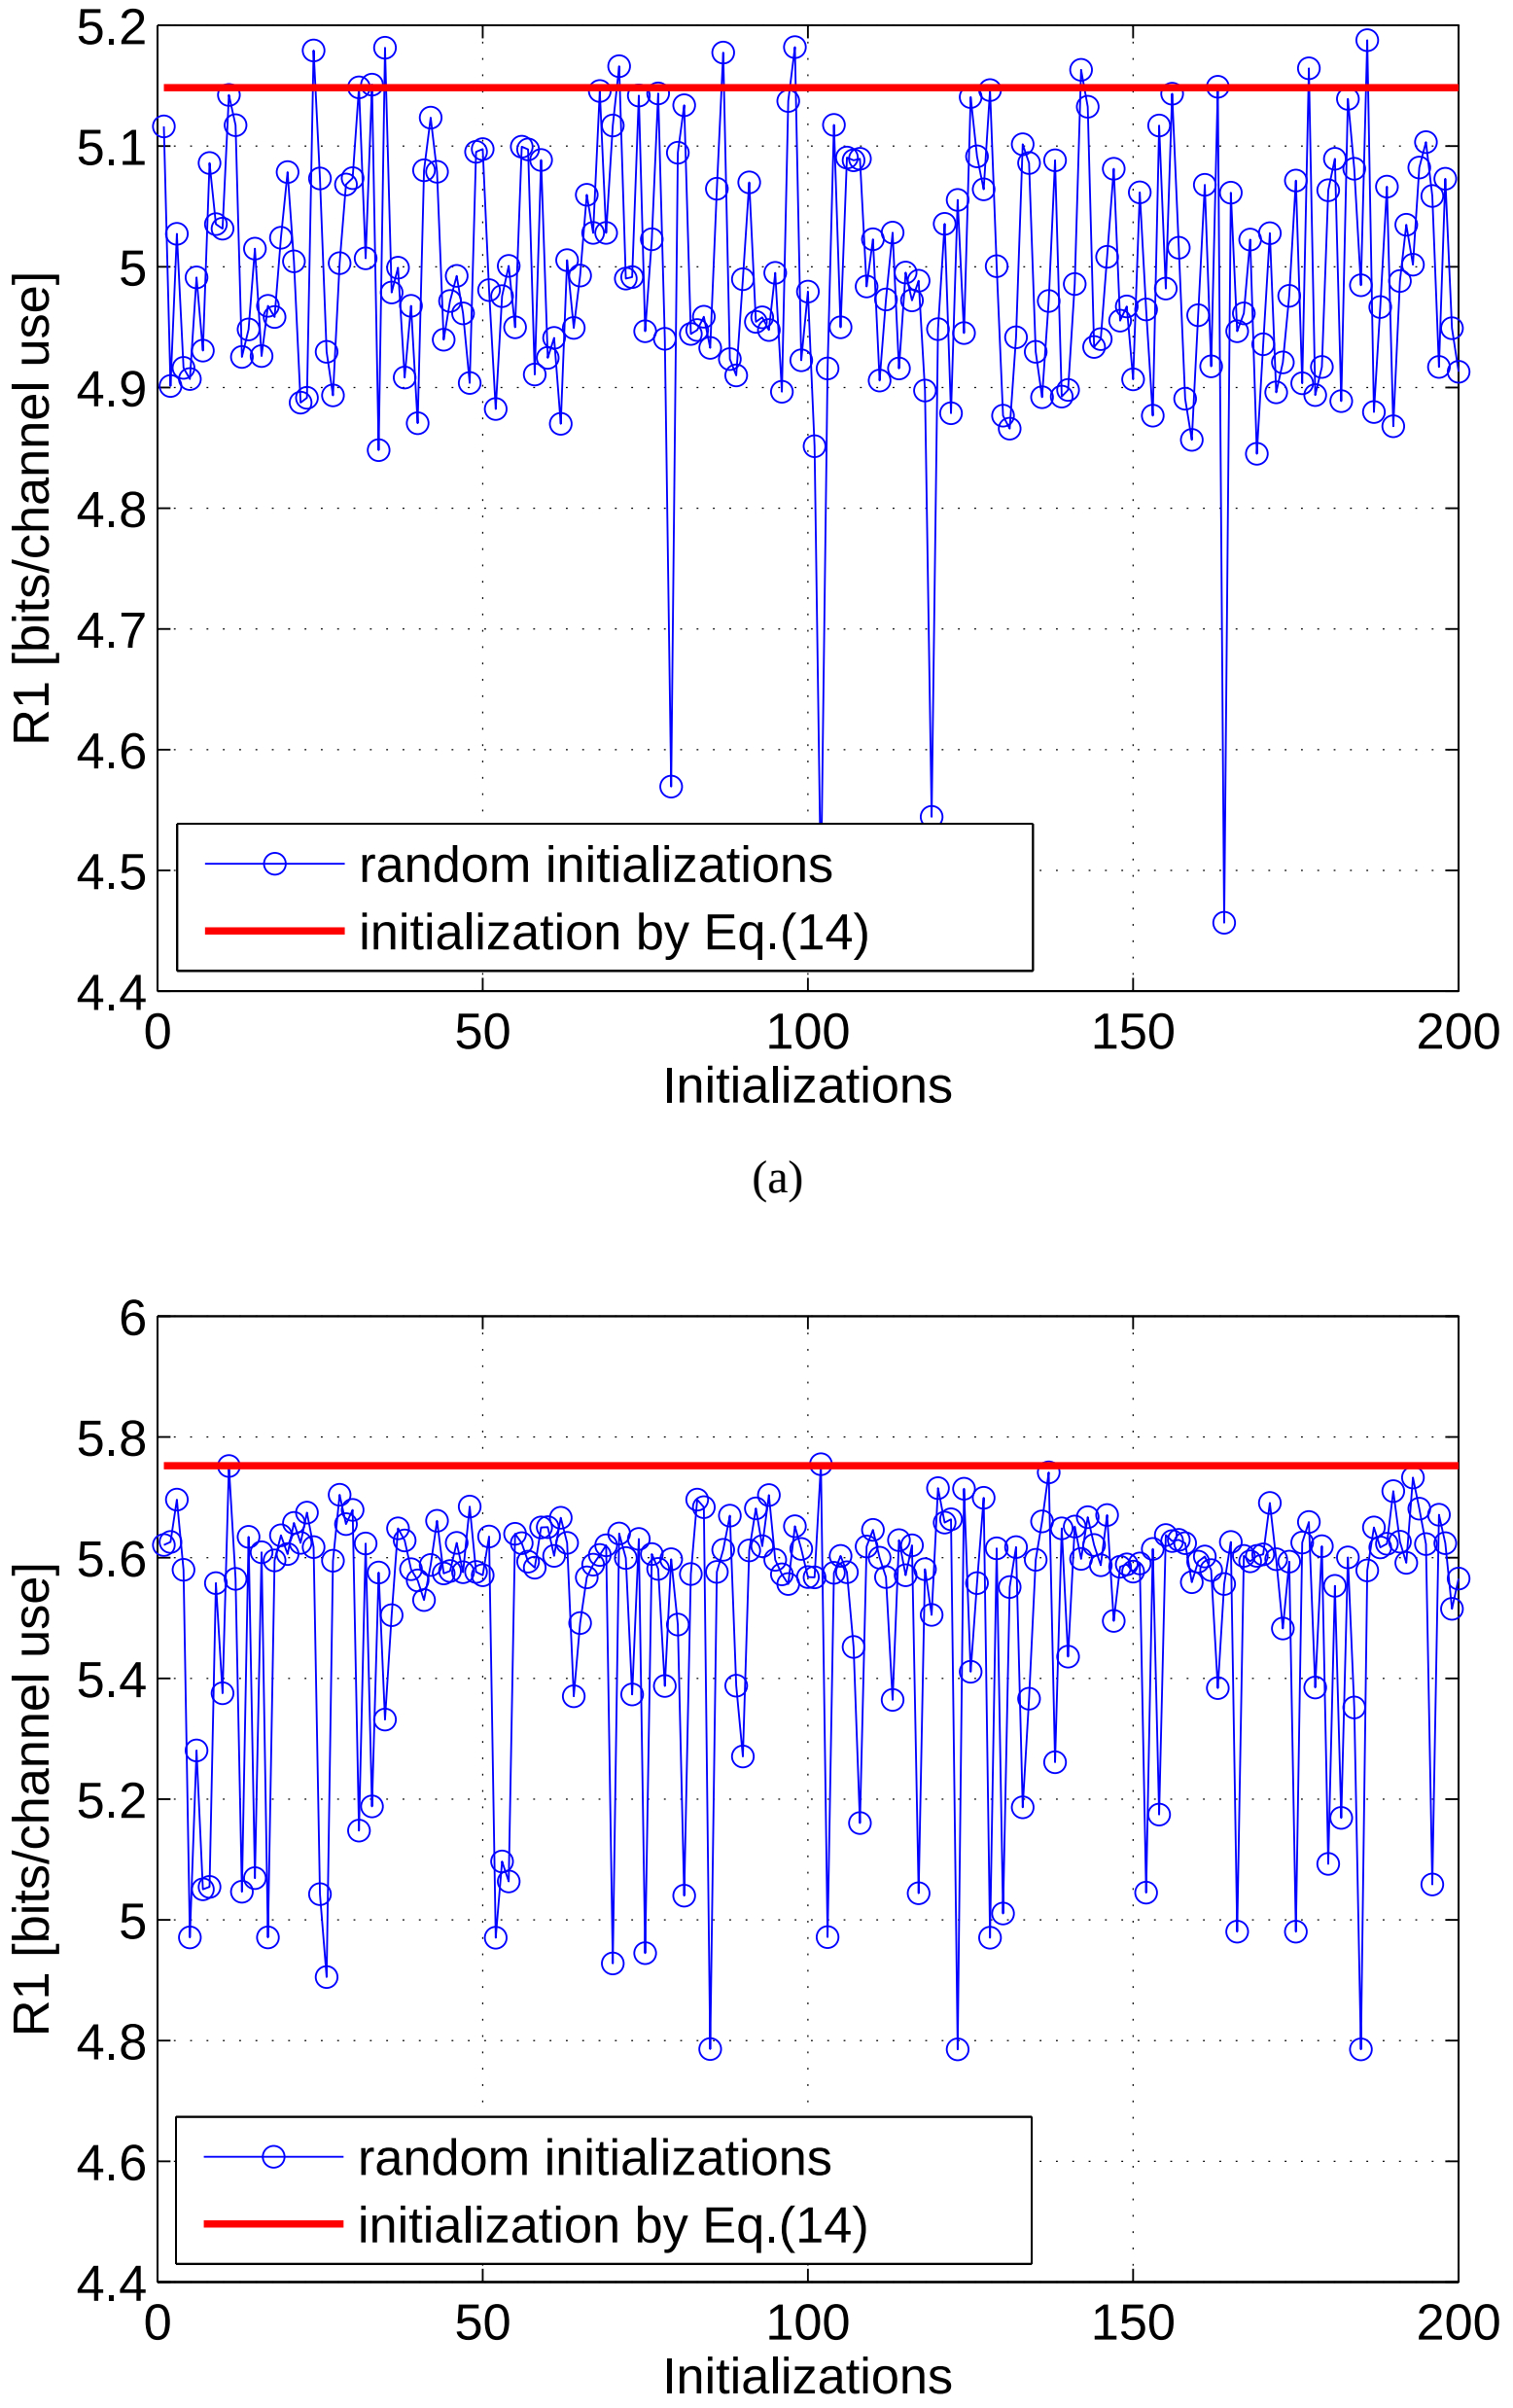

(a)

(b)

Fig. 1. Performance of IAA by different initializations with SNR=10dB and $N_T = 3, N_R = 2$: (a) R_1 by different initializations for a given $R_2^\star = 6.2898$; (b) R_1 by different initializations for a given $R_2^\star = 5.6398$.

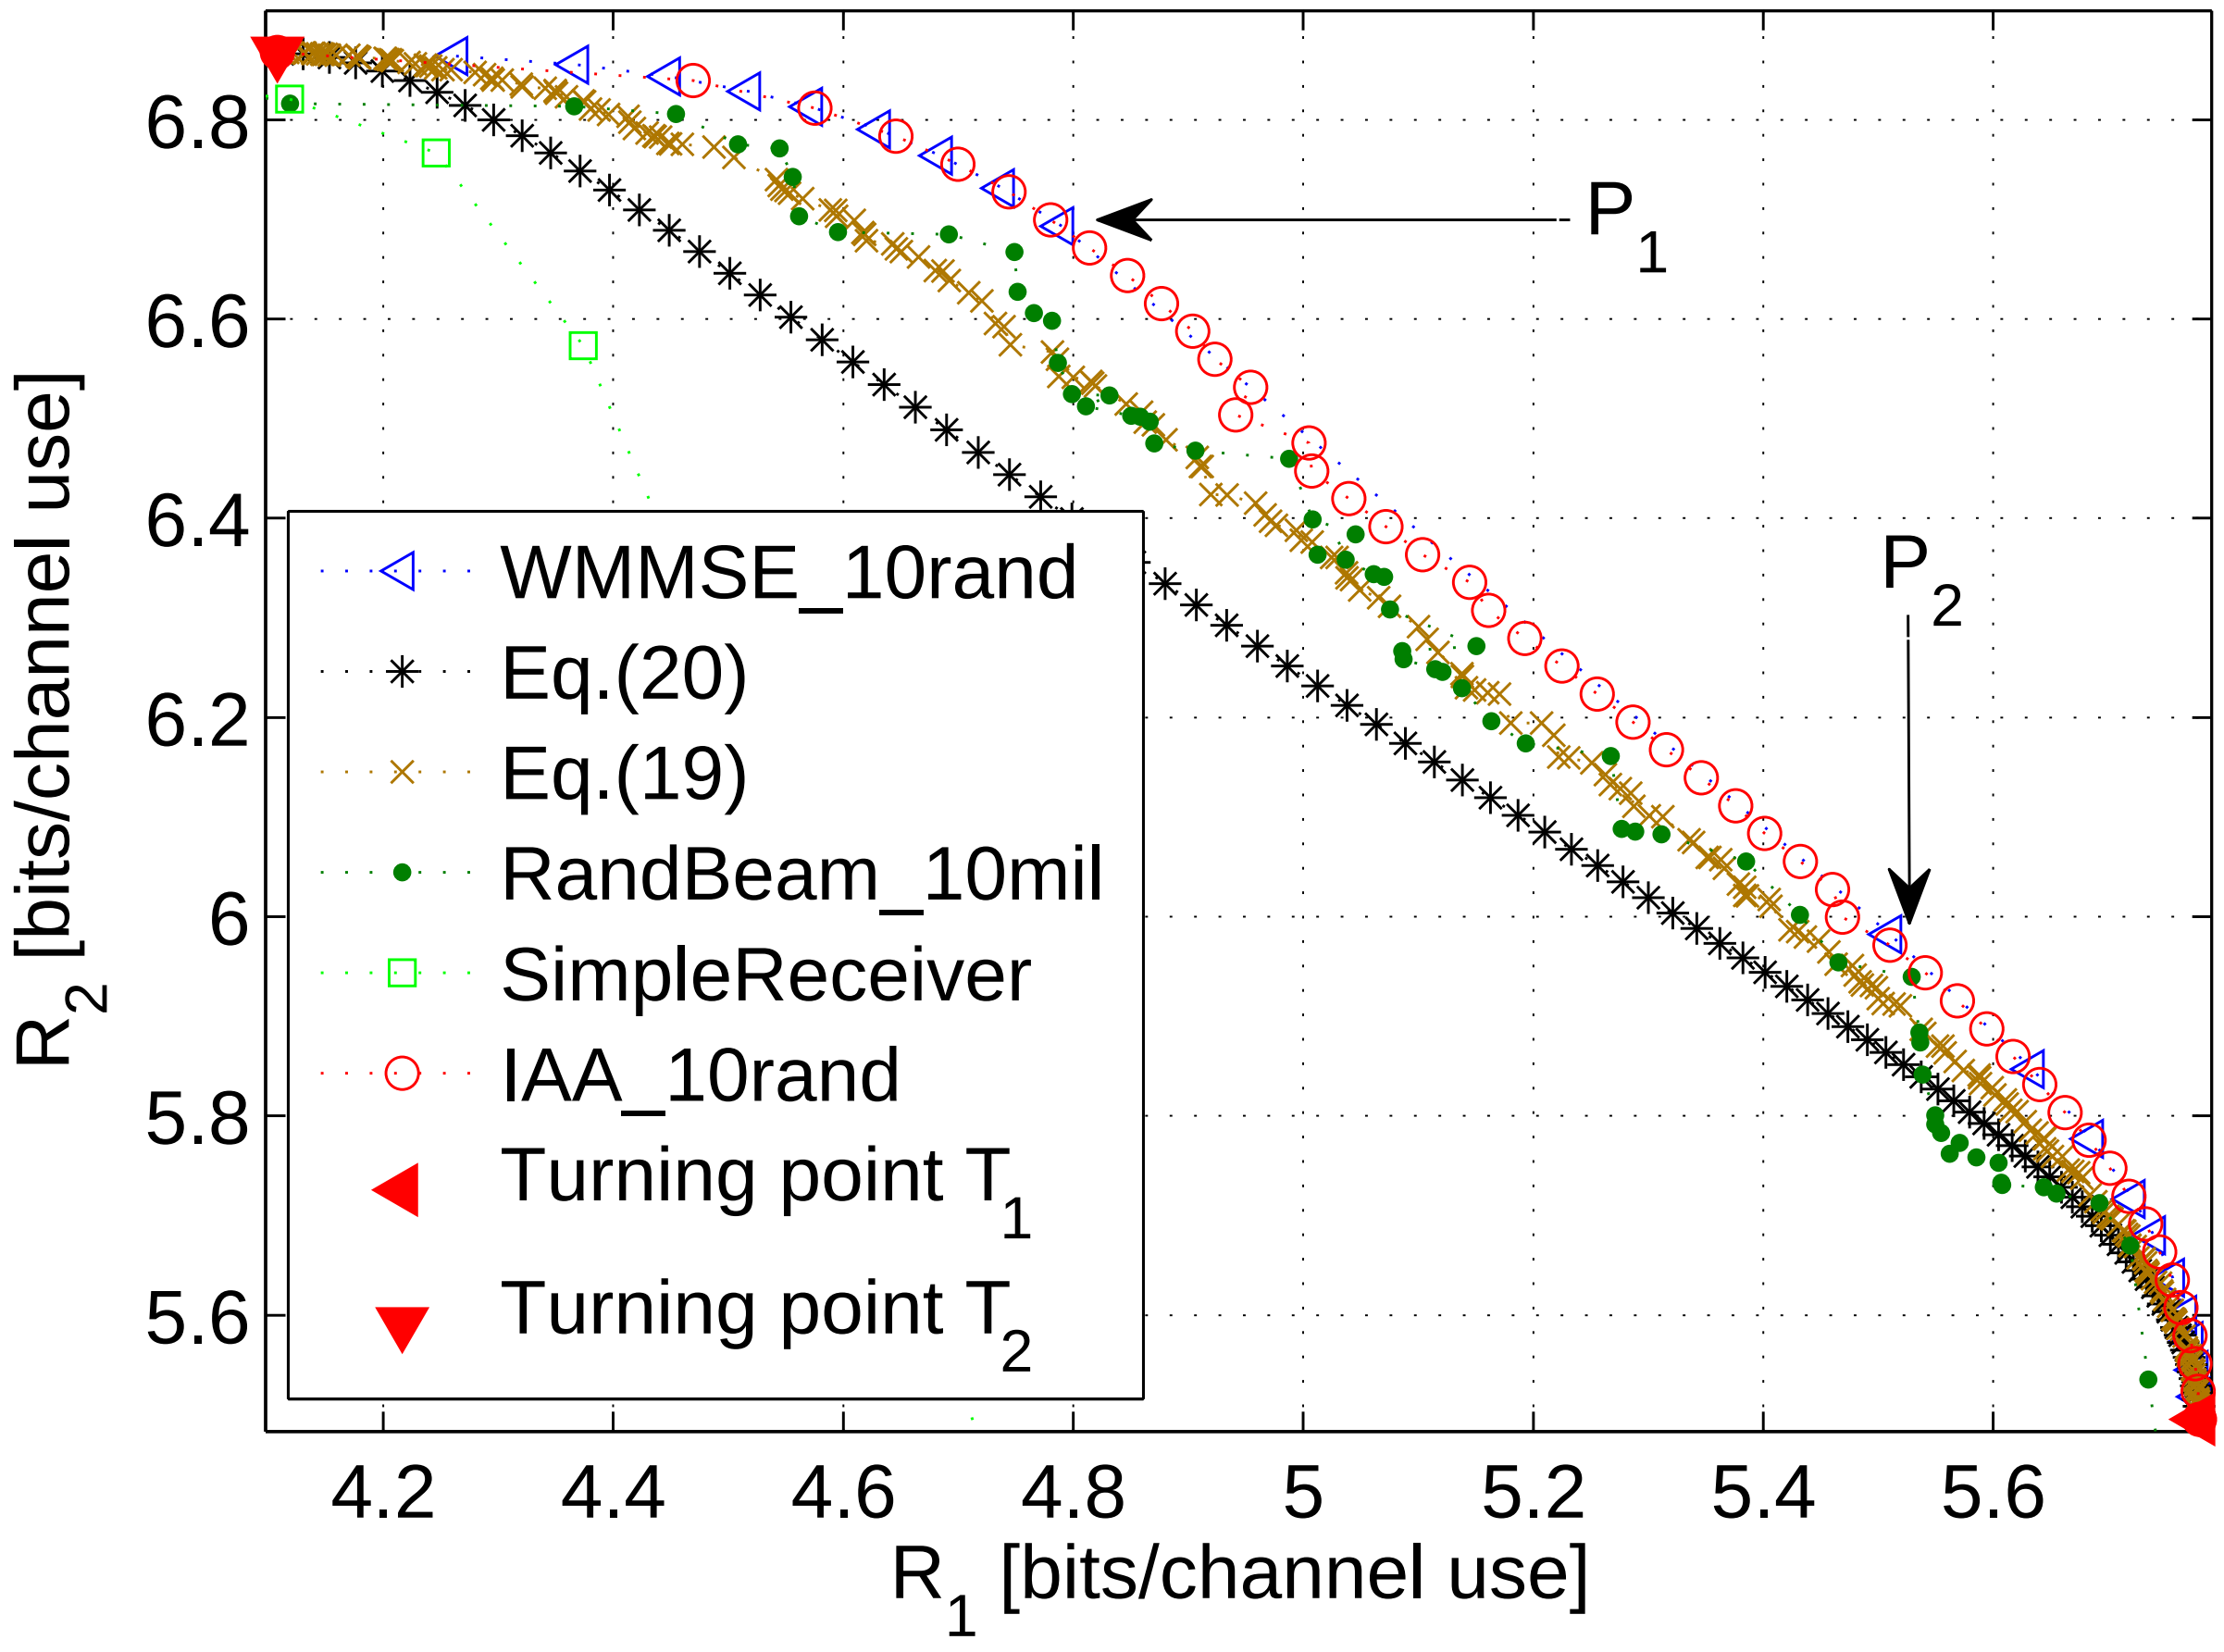

Fig. 2. Achievable boundary with SNR=10dB and $N_T = 3, N_R = 2$

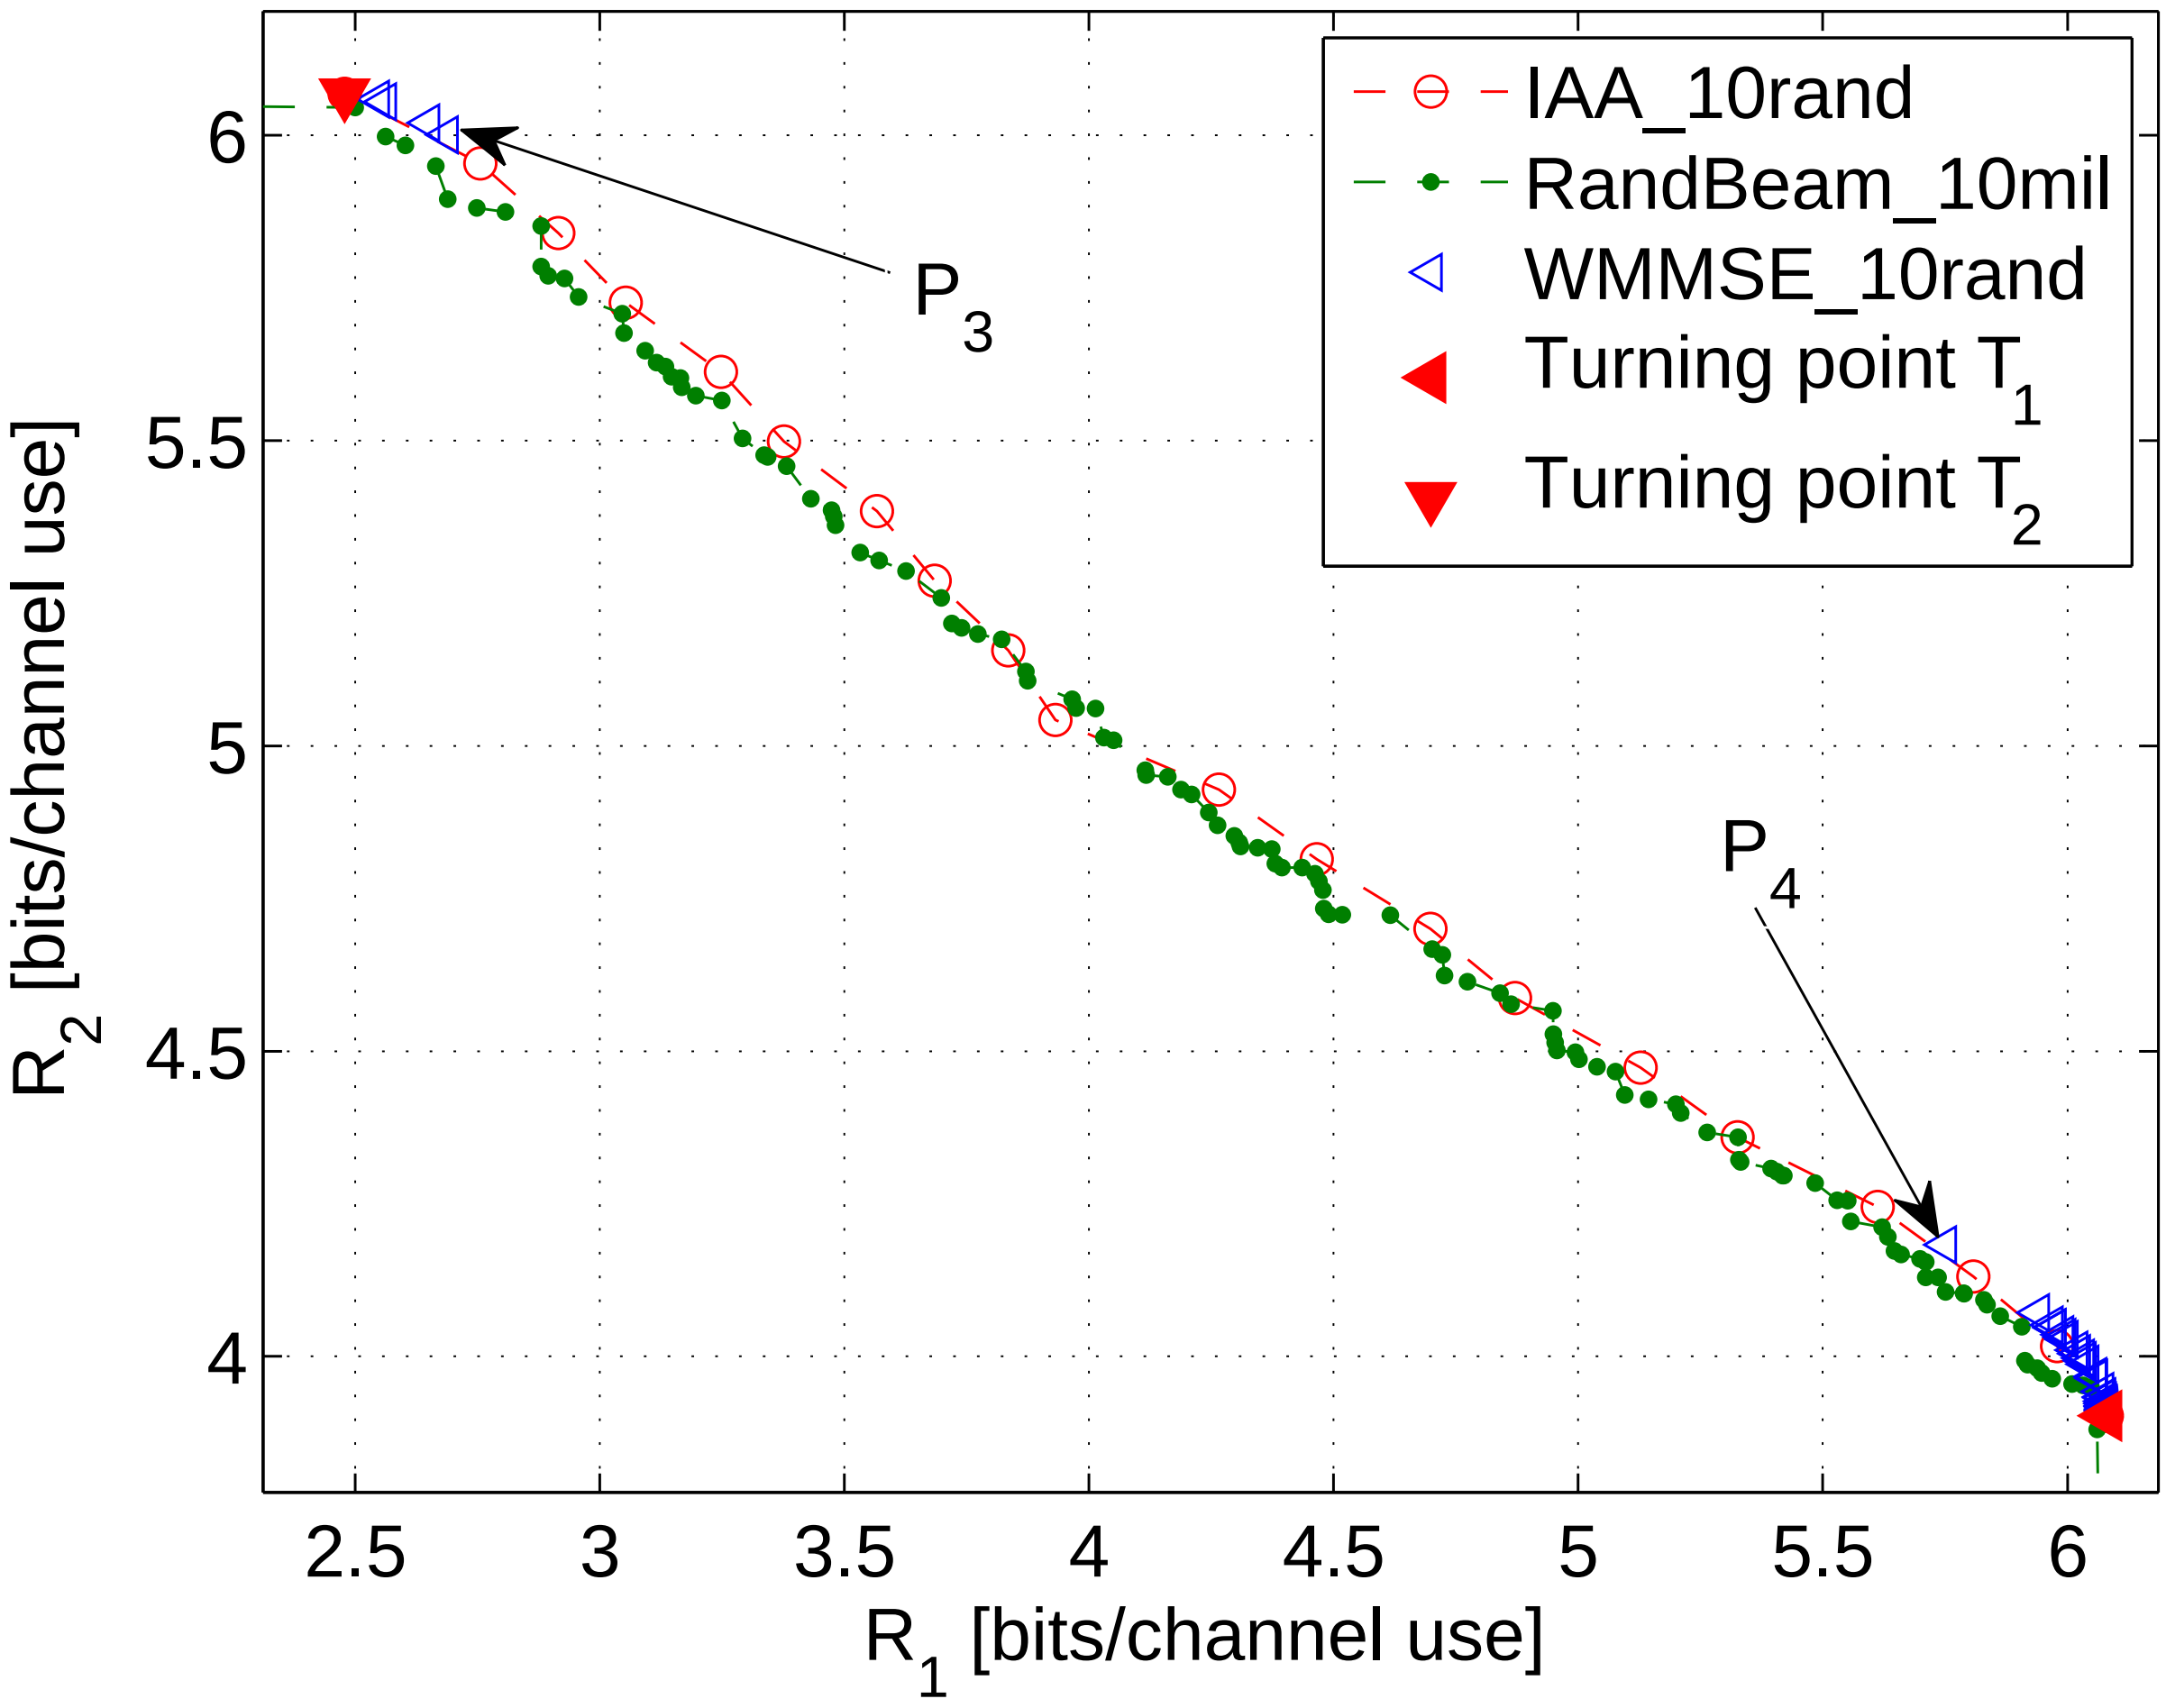

Fig. 3. Achievable boundary with SNR=10dB and $N_T = 3, N_R = 2$